

# The Mathematical Model of Nonequilibrium Effects in Water-Oil Displacement

G.I. Barenblatt and T.W. Patzek, SPE, Lawrence Berkeley Natl. Laboratory and U. of California, Berkeley; and D.B. Silin, SPE, Lawrence Berkeley Natl. Laboratory

## Summary

Forced oil-water displacement and spontaneous countercurrent imbibition are the crucial mechanisms of secondary oil recovery. Classical mathematical models of both these unsteady flows are based on the fundamental assumption of local phase equilibrium. Thus, the water and oil flows are assumed to be locally distributed over their flow paths similarly to steady flows. This assumption allows one to further assume that the relative phase permeabilities and the capillary pressure are universal functions of the local water saturation, which can be obtained from steady-state flow experiments. The last assumption leads to a mathematical model consisting of a closed system of equations for fluid flow properties (velocity, pressure) and water saturation. This model is currently used as a basis for numerical predictions of water-oil displacement.

However, at the water front in the water-oil displacement, as well as in capillary imbibition, the characteristic times of both processes are, in general, comparable with the times of redistribution of flow paths between oil and water. Therefore, the nonequilibrium effects should be taken into account. We present here a refined and extended mathematical model for the nonequilibrium two-phase (e.g., water-oil) flows. The basic problem formulation, as well as the more specific equations, are given, and the results of comparison with an experiment are presented and discussed.

## Introduction

The problem of simultaneous flow of immiscible fluids in porous media, and, in particular, the problem of water-oil displacement, both forced and spontaneous, are both fundamental to the modern simulations of transport in porous media. These problems are also important in engineering applications, especially in the mathematical simulation of the development of oil deposits.

The classical model of simultaneous flow of immiscible fluids in porous media was constructed in late 30s and early 40s by the distinguished American scientists and engineers M. Muskat and M.C. Leverett and their associates.<sup>1-3</sup> Their model was based on the assumption of local equilibrium, according to which the relative phase permeabilities and the capillary pressure can be expressed through the universal functions of local saturation.

The Muskat-Leverett theory was in the past of fundamental importance for the engineering practice of the development of oil deposits, and it remains so. Moreover, this theory leads to new mathematical problems involving specific instructive partial differential equations. It is interesting to note that some of these equations were independently introduced later as simplified model equations of gas dynamics.

Gradually, it was recognized that the classical Muskat-Leverett model is not quite adequate, especially for many practically important flows. In particular, it seems to be inadequate for the capillary countercurrent imbibition of a porous block initially filled with oil, one of the basic processes involved in oil recovery, and

for the even more important problem of flow near the water-oil displacement front. The usual argument in favor of the local equilibrium is based on the assumption that a representative sampling volume of the water-oil saturated porous medium has the size not too much exceeding the size of the porous channels. In fact, it happens that it is not always the case and that the nonequilibrium effects are of importance.

A model, which took into account the nonequilibrium effects, was proposed and developed by the first author and his colleagues<sup>4-8</sup>; see also Ref. 9. This model was gradually corrected, modified, and confirmed by laboratory and numerical experiments. In turn, this model leads to nontraditional mathematical problems.

In this paper, the physical model of the nonequilibrium effects in a simultaneous flow of two immiscible fluids in porous media is presented as we see it now. We also relate the new asymptotic time scaling of oil recovery by countercurrent imbibition in water-wet rock (Eq. 25) to experimental data. We discuss some peculiar properties of the solutions to the capillary imbibition problem clearly demonstrating nonequilibrium effects.

## Physical Model and Basic Equations

**The Basic Properties of the Flow of Two Immiscible Fluids in a Porous Medium: Generalized Darcy's Law and Conservation Laws.** We begin with an assumption that usually is not explicitly formulated but is fundamental. This assumption is as follows. Consider two-phase water-oil flow (more generally, of a wetting and nonwetting immiscible fluid) in an isotropic and homogeneous porous medium. Then, for a given fluid (e.g., oil), the other one (water) and the porous skeleton of the rock can be considered together as an effective porous medium. Physically, it means that for a given fluid, the other fluid creates an additional drag (i.e., the lubrication effects for a given fluid do not exist). This assumption makes it possible to apply to the two-phase horizontal flows in an isotropic porous medium a generalized Darcy law in the form:

$$u_w = -\frac{kk_{rw}}{\mu_w} \nabla p_w \quad u_o = -\frac{kk_{ro}}{\mu_o} \nabla p_o$$

$$p_o - p_w = \gamma \sqrt{\frac{\phi}{k}} J. \dots\dots\dots (1)$$

Here the subscripts *w* and *o* correspond, respectively, to water (the wetting fluid) and oil (the nonwetting fluid), *u<sub>i</sub>* are the filtration velocities of the fluids, *p<sub>i</sub>* are their pressures, and *μ<sub>i</sub>* are their dynamic viscosities, *i* = *o, w*. Furthermore, *k* is the absolute permeability of the porous medium determined from one-phase flow experiments; *φ* is its porosity (i.e., the relative volume occupied by the pores); *γ* is the surface tension at the water-oil interface. The dimensionless quantities *k<sub>rw</sub>* and *k<sub>ro</sub>*, which according to our basic assumption satisfy the inequalities  $0 \leq k_{ri} \leq 1$ , are called the relative permeabilities. The function *J*, the dimensionless capillary pressure, is named the Leverett function after M.C. Leverett.

The mass conservation laws for both components of the mixture have the form:

$$\phi \frac{\partial S}{\partial t} + \nabla \cdot u_w = 0, \quad \phi \frac{\partial (1-S)}{\partial t} + \nabla \cdot u_o = 0. \dots\dots\dots (2)$$

Copyright © 2003 Society of Petroleum Engineers

This paper (SPE 87329) was revised for publication from paper SPE 75169, prepared for presentation at the 2002 SPE/DOE Improved Oil Recovery Symposium, Tulsa, 13-17 April. Original manuscript received for review 29 May 2002. Revised manuscript received 18 June 2003. Manuscript peer approved 29 June 2003.

Here  $S$  is the saturation, the fractional pore volume occupied by water, and  $t$  denotes the time. By taking the sum of Eq. 2, we obtain an important equation of the fluid incompressibility

$$\nabla \cdot u = 0. \dots\dots\dots (3)$$

Here,  $u = u_w + u_o$ , is the bulk volumetric flux.

**The Classical Muskat-Meres-Leverett Mathematical Model of Two-Phase Flow in Porous Media.** The system consisting of Eqs. 1 and 2 is not closed until the functions  $k_{rw}$ ,  $k_{ro}$ , and  $J$  are properly determined. The classical two-phase flow model proposed by M. Muskat, M. Meres,<sup>1</sup> and M.C. Leverett<sup>3</sup> (see also a more recent book<sup>9</sup>) is based upon the fundamental assumption that the local state of the flow is universal and fully in equilibrium. This means that the functions  $k_{rw}$ ,  $k_{ro}$ , and  $J$  are functions of the actual water saturation  $S$ , identical for all unidirectional processes (water saturation either decreases or increases) involving two fluid components and the rock.

$$k_{rw} = k_{rw}(S), \quad k_{ro} = k_{ro}(S), \quad J = J(S). \dots\dots\dots (4)$$

Thus, if these functions are known, the system created by Eqs. 1 through 3 is closed. This mathematical model found numerous applications, and now it forms the basis of numerical simulations of the development of oil deposits throughout the world.

**Nonequilibrium Effects.** According to the classical model, the functions  $k_{rw}$ ,  $k_{ro}$ , and  $J$  are universal; therefore, they can be obtained from any unidirectional two-phase flow experiment. In particular, they can be obtained from experiments with steady flows of mixtures at constant water saturation  $S$  through a cylindrical core. Such experiments, indeed, were performed, and generally accepted characteristic structures of these functions are presented in Fig. 1.

Let us formulate rigorously the properties of the relative permeability and capillary pressure functions, which will be used below. The water relative permeability  $k_{rw}$  is a monotone nondecreasing smooth function. It is equal to zero for  $0 \leq S \leq S_*$ , where  $0 \leq S_* < 1$ . In other words, if the water saturation becomes lower or equal to  $S_*$ , the water flow stops. The function  $k_{rw}(S)$ , in accordance with the experimental data, will be assumed further to have multiple (at least two) zero derivatives at  $S = S_*$ . The function  $k_{ro}(S)$  is monotone and nonincreasing. It is equal to one for  $0 \leq S \leq S_*$ , and equal to zero at  $S^* \leq S \leq 1$ , where  $S^*$  is such that  $S_* < S^* \leq 1$  and the oil flow stops as the water saturation exceeds  $S^*$ . Finally, the Leverett capillary pressure function  $J(S)$  decreases monotonically. It is equal to infinity at  $S = S_*$ , equal to zero at  $S = S^*$  and the derivative  $J'(S)$  at  $S = S^*$  is equal to  $-\infty$ . For simplicity, in Fig. 1 it was assumed that  $S_* = 0$  and  $S^* = 1$ . We will use this assumption everywhere from this point on.

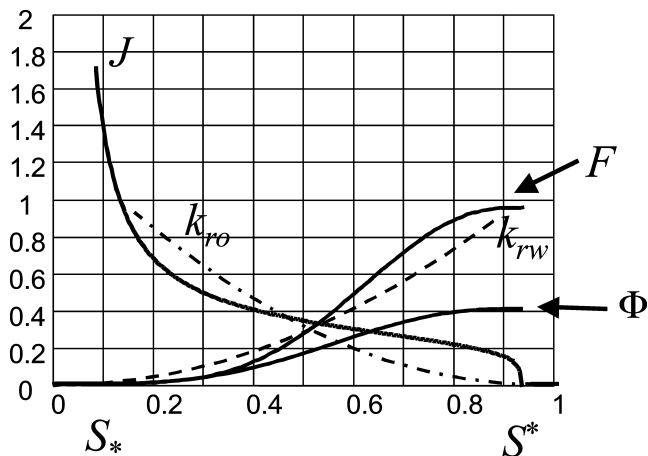


Fig. 1—The qualitative form of the universal functions.

As we mentioned before, the classical model outlined in the previous section plays a decisive role in the numerical simulations of the development of oil deposits. However, for strongly unsteady practically important flows, such as the capillary imbibition of a porous block, especially at an early stage, or the flow near the water-oil displacement front, the classical model seems to be inadequate. Indeed, it is well known to the experimentalists that before reaching a new steady state needed to measure the relative-phase permeabilities and the Leverett function, it is necessary to pump through a porous specimen 5 to 6 pore volumes of the mixture. The physical reason for the prolonged time required to change the fluid saturations from one steady-state value to another is transparent. In steady-state flow, there exist separate networks of flow paths connecting the flowing portion of each phase. The flow paths of the nonwetting fluid, oil, are within a fixed network of pores, and the fluid flows through the central parts of these pores. The wetting fluid, water, remains connected throughout most, if not all, pores in the porous medium. Water occupies the smallest pores, which have capillary entry pressures above the current capillary pressure level. In the pores where both fluids flow, the water flows along the pore corners in filaments and in the pore-wall roughness. Any change of the capillary pressure results in the rearrangement of both flow networks, resulting in changes of their connectivity and their overall hydraulic conductances for the fluids flowing in them. A detailed investigation of the microscopic, pore-level mechanisms governing such a rearrangement was performed in Ref. 10; see also the references therein. In fact, the relative flow rates in all pores and, possibly, the types of the flowing fluids in some pores, must change. Therefore, a capillary pressure change implies myriads of single-pore rearrangements. The time elapsed to pass from one steady-state configuration to another can be substantial. Characteristic time of rearrangement of the flow networks and consequent modification of their flow properties is called the redistribution time.

For processes with slowly varying water saturation  $S$ , the characteristic time scale of the process is large in comparison with the redistribution time, and the hypothesis of the equilibrium local distribution of the phases in porous media can be accepted. In such a case, the functions  $k_{rw}$ ,  $k_{ro}$ , and  $J$  in relations (Eq. 1) can be assumed to be universal functions (Eq. 4) of water saturation  $S$  only. However, for the fast processes, among which are such practically important processes as the capillary imbibition or the forced water-oil displacement near the front, the characteristic time scale of the process is often of the order of the redistribution time, and the classical approach based on relations (Eq. 4) becomes invalid.

For such nonequilibrium processes, the actual values of the relative phase permeabilities and the Leverett function defining the flux at a given water saturation can be significantly different from the respective values of the functions  $k_{rw}$ ,  $k_{ro}$ , and  $J$  obtained by steady-state measurements or by some other experiment based on the assumption of the universality of relationships (Eq. 4).

There are, however, some instructive properties of the functions  $k_{rw}(S)$ ,  $k_{ro}(S)$ , and  $J(S)$  determined under equilibrium conditions that allow one to avoid this difficulty. Namely, the structure of the function  $k_{rw}(S)$  allows one to claim that for every nonequilibrium process there exists an effective saturation  $\eta$ , generally speaking different from  $S$ , such that the nonequilibrium value of  $k_{rw}$  is equal to the equilibrium value of the same function  $k_{rw}$  evaluated, not at the actual saturation  $S$ , but at this effective saturation  $\eta$ . However, the function  $k_{rw}$  is a monotone function of water saturation, which varies from zero to one. Therefore, there exists a certain value  $\eta$ , for which  $k_{rw}(\eta)$  is equal to the nonequilibrium relative permeability of water. For the functions  $k_{ro}$  and  $J$ , analogous statements are valid as well. An important point here is that the effective saturation  $\eta$  is always higher than the actual saturation  $S$ , or equal to it (Fig. 2) for all three quantities.

Indeed, we consider here only the immiscible two-phase flow in a porous medium, like water-oil displacement, where the local water saturation is increasing, or at least nondecreasing, so that  $\frac{\partial S}{\partial t} \geq 0$ . Therefore, we exclude from the consideration the changes

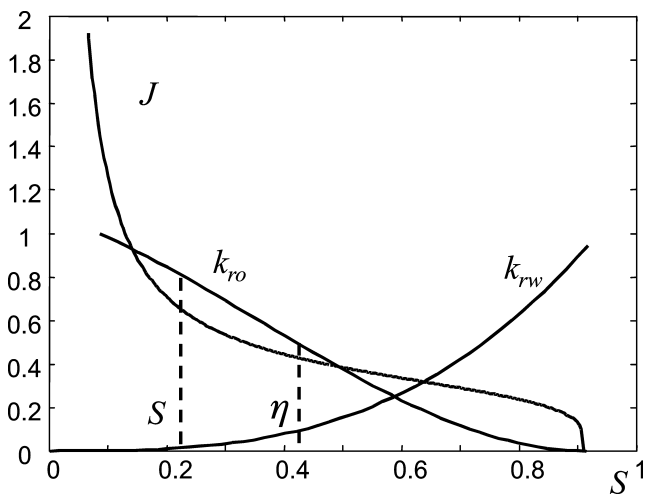


Fig. 2—The effective saturation  $\eta$  is always higher than the actual saturation  $S$ .

of the relative permeabilities and capillary pressure caused by hysteresis effects. For the forced water-oil displacement, a certain part of the water temporarily occupies the wider channels, which in the future will be retaken by the oil. Therefore, the relative water permeability for a nonequilibrium process should be higher, or at least not less, than for the equilibrium one. At the same time, the oil temporarily occupies the narrow channels, which it will release in favor of the water after the redistribution of the fluids. Therefore, the relative oil permeability should be less, or at least not larger, than the equilibrium one. For the same reasons, the nonequilibrium capillary pressure (Leverett function) is less (not higher at least) than the equilibrium one.

In spontaneous imbibition, a genuinely nonequilibrium process, the capillary pressure decreases in very small decrements as quickly as the flow networks can adapt. As a result, the water saturation increases monotonically, and the hydraulic conductance of the water flow network also increases monotonically, while the reverse is true for the oil flow networks (there can be many of them, each connected to the inlet, the outlet, or both). It just takes some time for these changes to occur. Therefore, we may introduce effective water saturation  $\eta$ , and evaluate all the macroscopic flow functions (i.e., both relative permeabilities and the capillary pressure) at this saturation. As a result, in a nonequilibrium flow, the water relative permeability is always higher, the oil relative permeability is always lower, and the macroscopic driving force for the imbibition, the capillary pressure, is also lower.

This positive shift from the actual saturation to the effective one could be, generally speaking, different for all three functions  $k_{rw}$ ,  $k_{ro}$ , and  $J$ . We will make, however, an essential simplifying assumption: For all three functions  $k_{rw}$ ,  $k_{ro}$ , and  $J$  the effective saturations are identical, so that instead of relationships (Eq. 4) we have

$$k_{rw} = k_{rw}(\eta), k_{ro} = k_{ro}(\eta), J = J(\eta), \dots \quad (5)$$

where the functions  $k_{rw}$ ,  $k_{ro}$ , and  $J$  are the universal functions measured under the conditions of steady-state flow.

The new model will be closed if we provide a relationship between the actual saturation  $S$  and the effective saturation  $\eta$ . The difference  $\eta - S$  is, in fact, a complicated functional reflecting the whole history of the process. Bearing in mind the first order nonequilibrium effects, we will assume that difference  $\eta - S$  depends on the current saturation  $S$ , the current saturation rate  $\frac{\partial S}{\partial t}$ , and the redistribution time  $\tau$ . Thus, we get

$$\eta - S = X\left(S, \tau, \frac{\partial S}{\partial t}\right), \dots \quad (6)$$

where  $X$  is a dimensionless function. In the last equation, we neglect possible direct dependence of the difference  $\eta - S$  on the gradient of saturation because the representative volume of porous medium around a given point is small. However, this difference depends on the spatial derivatives of saturation indirectly, through the flow equations. From these assumptions, using dimensional analysis, we obtain

$$\eta - S = \Psi\left(S, \tau \frac{\partial S}{\partial t}\right), \dots \quad (7)$$

where  $\Psi$  is another dimensionless function. Obviously  $\Psi(S, 0) = 0$ , because  $\eta = S$  for the processes with a steady saturation. Furthermore, the argument  $\tau \frac{\partial S}{\partial t}$  can be represented in the form  $\frac{\tau}{T} \frac{\partial S}{\partial \vartheta}$ , where  $T$  is the characteristic time scale of the process, and  $\vartheta = \frac{t}{T}$  is the dimensionless time based on this global time scale. For the nonequilibrium processes slightly deviating from equilibrium, we have the basic dimensional parameter

$$\varepsilon = \frac{\tau}{T}, \dots \quad (8)$$

much less than unity:  $\varepsilon \ll 1$ . Expanding Eq. 7 in the small parameter  $\varepsilon$  and restricting ourselves by the first term of the expansion, we obtain

$$\eta - S = g(S) \tau \frac{\partial S}{\partial t}, \dots \quad (9)$$

where  $g(S)$  is a certain function of the actual water saturation. We can assume further that  $g(S) = 1$ , because the redistribution time  $\tau$  is a quantity defined only with the accuracy of a factor of the order of unity. Moreover, generally speaking, the redistribution time is also saturation-dependent (see below). Therefore, we arrive at the final relation, which will be used in the remainder of the paper:

$$\eta - S = \tau \frac{\partial S}{\partial t}, \dots \quad (10)$$

For simplicity, at first we assume that  $\tau$  be constant. In fact, at endpoint saturations  $S = S_*$  and  $S = S^*$  the redistribution time can have a singular behavior, and some interesting effects are related to this behavior, as we will see.

Eq. 10 relates the effective saturation  $\eta$  to the local rate of change of the instantaneous water saturation  $S$ . The spatial variation of  $S$  affects the flows of both fluids; therefore, the flow equations establish additional links between both actual and effective saturations and their gradients.

The system of Eqs. 1, 2, 5, and 10 is closed, and will be considered as the basic mathematical model for our further consideration of the nonequilibrium two-phase flows in porous media. This system can be reduced to the form of Eqs. 3 and 10 complemented by the equation

$$\frac{\partial S}{\partial t} + \frac{1}{\phi} \nabla \cdot [uF(\eta)] = a^2 \nabla^2 \Phi(\eta), \dots \quad (11)$$

where  $a^2 = \frac{\gamma}{\mu_w} \sqrt{\frac{k}{\phi}}$ , and the functions  $F$  and  $\Phi$  are defined by the following relationships:

$$F(S) = \frac{k_{rw}(S)}{k_{ro}(S) + \mu k_{rw}(S)}, \dots \quad (12)$$

$$\Phi(S) = - \int_0^S F(\xi) k_{ro}(\xi) J'(\xi) d\xi, \dots \quad (13)$$

In Eq. 12,  $\mu = \mu_o / \mu_w$ . The functions defined by Eqs. 12 and 13 are also plotted in Fig. 1. Both curves  $F$  and  $\Phi$  have a characteristic S-shaped form, and we assume that they have multiple zero derivatives at  $S = S_*$  and  $S = S^*$ . Furthermore,  $F(S^*) = \frac{1}{\mu}$ .

Note that from Eq. 10 we obtain that in the first approximation

$$\eta = S(t + \tau), \dots\dots\dots (14)$$

so that according to the accepted mathematical model, the effective saturation  $\eta$  is the saturation at a certain time ahead of, not behind, the actual time. There is no paradox here: The redistribution of flow channels between the fluids is a more complicated process than the memory of the saturation evolution and the effective saturation at a certain time results from a redistribution process, which can be assumed to be steady.

From Eqs. 10 and 11, the basic equation for the effective water saturation  $\eta$  is obtained:

$$\frac{\partial \eta}{\partial t} + \frac{1}{\phi} \nabla \cdot \left\{ u \left[ F(\eta) + \tau \frac{\partial}{\partial t} (\eta) \right] \right\} = a^2 \nabla^2 \left[ \Phi(\eta) + \tau \frac{\partial}{\partial t} \Phi(\eta) \right]. \dots\dots\dots (15)$$

There is, however, a delicate point. Eq. 15 is an evolution equation, and to solve it an initial condition is needed.

$$\eta(0, x) = \eta_0(x). \dots\dots\dots (16)$$

However, it is impossible to prescribe this initial condition directly, because the effective saturation is not, in fact, a measurable quantity. What can be considered as a quantity, which can be prescribed, is the actual water saturation only because the latter is directly measurable.

$$S(0, x) = S_0(x). \dots\dots\dots (17)$$

However, using Eq. 17, we can obtain the initial distribution of the effective saturation (Eq. 16). Indeed, relationship (Eq. 10) implies

$\frac{\partial S}{\partial t} = \frac{\eta - S}{\tau}$ . Putting this into Eq. 11 at  $t=0$  we obtain an elliptic differential equation:

$$\eta_0 + \frac{\tau}{\phi} \nabla \cdot [uF(\eta_0)] - \tau a^2 \nabla^2 \Phi(\eta_0) = S_0(x). \dots\dots\dots (18)$$

By solving this equation with respect to  $\eta_0$ , the initial distribution of the effective saturation  $\eta_0(x)$  can be obtained: We remind that  $S_0(x)$  on the right side of Eq. 18 is a known function. It is essential that in Eq. 18 the actual water saturation  $S_0(x)$  can be, in general, discontinuous at the boundary  $\partial\Omega$ , whereas the function  $\eta_0(x)$  is continuous.

The physical model and the basic equations presented here are a modified version of the model presented in papers<sup>4,5</sup>; see also Ref. 9. An important experimental verification of this model was performed by Bocharov, Vitovskii, and Kuznetsov.<sup>11</sup> Numerical computations of nonequilibrium flows based on this model were performed by Bocharov, Kuznetsov, and Checkovich.<sup>12</sup> The character of the modification will be clear after the consideration of the most important special cases: The countercurrent capillary imbibition of a porous block filled initially by oil, and the flow near the water-oil displacement front.

**Capillary Countercurrent Imbibition.** In this flow, because of the incompressibility of both fluids, the total fluid flux is identically equal to zero:

$$u = u_w + u_o \equiv 0. \dots\dots\dots (19)$$

Therefore, the basic equation for the effective water saturation (Eq. 15) reduces to the form

$$\phi \frac{\partial \eta}{\partial t} = a^2 \nabla^2 \left[ \Phi(\eta) + \tau \frac{\partial}{\partial t} \Phi(\eta) \right], \dots\dots\dots (20)$$

and the initial condition is obtained by solving the equation

$$\eta_0(x) - \tau a^2 \nabla^2 \Phi[\eta_0(x)] = S_0(x) \dots\dots\dots (21)$$

under the appropriate boundary conditions. This problem was considered in Ref. 6, and Eq. 20 was obtained and qualitatively investigated there. A rigorous mathematical investigation was performed in Refs. 13 and 8.

Now, we will illustrate the basic qualitative differences between the classic equilibrium model ( $\tau=0$ ), and the proposed non-equilibrium model ( $\tau>0$ ). According to the classical model, the water saturation  $S$  satisfies the nonlinear parabolic equation

$$\frac{\partial S}{\partial t} = a^2 \nabla^2 \Phi(S). \dots\dots\dots (22)$$

This equation was obtained by Ryzhik.<sup>14</sup> Because of the properties of the function  $\Phi(S)$  formulated above, for an initial condition identically equal to zero outside a certain finite domain, the solution to Eq. 22 also vanishes outside a certain finite domain, depending on time. In particular, if we consider a 3D porous block  $\Omega$ , which initially does not contain water, so that  $S_0(x) \equiv 0$  in  $\Omega$ , and at  $t=0$  the boundaries become open to water, the latter will propagate into the block gradually. It means that at small  $t$ , the region near the boundary where the water has penetrated is arbitrarily narrow.

It is not so when the redistribution time  $\tau$  is nonzero and constant. As shown in Refs. 6 through 8, the initial effective saturation is different from zero in a finite, not arbitrarily narrow region near the boundary of the domain  $\Omega$  at arbitrarily small  $t>0$ . Therefore, at arbitrarily small times, water penetrates a finite part of the block. In particular, if the size of the block is small, the water can penetrate the whole block instantaneously. If the block is large enough and cannot be imbibed instantaneously, then the property of the finite speed of water propagation is preserved.


Consider now the special case of 1D nonequilibrium countercurrent water imbibition into a large initially oil-saturated porous block contacting water at the inlet face. Then, Eq. 11 takes the following form:

$$\frac{\partial S}{\partial \tau} = a^2 \frac{\partial^2 \Phi(\eta)}{\partial x^2}. \dots\dots\dots (23)$$

Here, the  $x$ -axis is directed into the block orthogonally to the inlet face. This problem was considered in Ref. 6 under the assumption that the redistribution time  $\tau$  is a positive constant so that the equation for the initial distribution of the effective saturation had the form

$$\tau a^2 \frac{d^2 \Phi[\eta_0(x)]}{dx^2} - \eta(x) + S_0(x) = 0, \dots\dots\dots (24)$$

where  $S_0(x)$  is the initial distribution of the actual water saturation. Of special interest is the case when the initial water saturation is zero. Then, as shown in Ref. 6, the function  $\eta_0(x)$ —the initial effective saturation—is different from zero on a certain interval  $0 \leq x \leq x_0$ , where  $x_0$  is a positive parameter obtained in the course of solution (**Fig. 3**). This means that water penetrates into a certain part of the block instantaneously, but further, it propagates into the block with a finite speed.

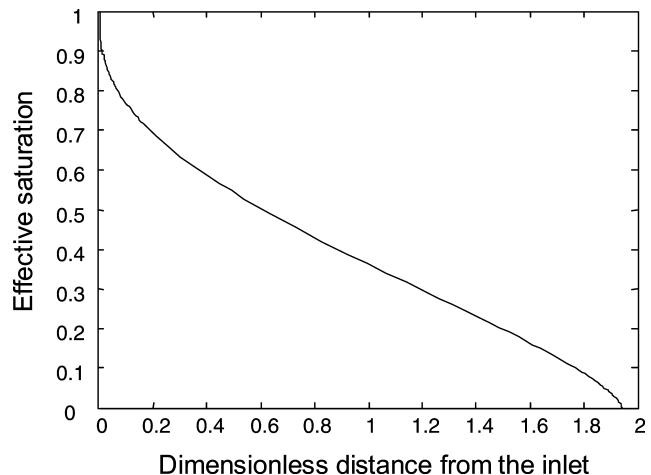

**Fig. 3—The effective saturation  $\eta_0(x)$  is different from zero in a finite region at an arbitrarily small time.**



The assumption that the redistribution time is constant cannot be justified in the case in which the initial saturation is zero. At low saturations, water flows through the narrowest flow paths in the corners of pore space, and the capillary pressure is high. Therefore, the time needed to reconfigure water distribution is small, and the relaxation time goes to zero as the water saturation approaches its minimal value. As the oil saturation is approaching its residual value, the capillary forces weaken and the connectivity of oil grows sparse; therefore, the redistribution time increases infinitely. Across most of the interval between the endpoint saturations, the relaxation time is roughly inversely proportional to the derivative of capillary pressure, which is close to a constant value. The dependence of the relaxation time on water saturation was considered earlier in Refs. 11 and 12 in the context of numerical simulations of forced water-oil displacement. In both papers, it was assumed that  $\tau(0) = 0$ .

In Ref. 15, the problem of water imbibition into a semi-infinite initially oil-saturated block was reconsidered under the assumption that  $\tau$  is a function of saturation vanishing at  $S = 0$  and going to infinity at  $S$  close to one. An additional assumption of the power-law saturation dependence at low saturations was accepted. Under these assumptions, the initial value of the effective saturation is also zero according to Eq. 10.

In Ref. 15, the asymptotic solutions were obtained at small and large times. It was assumed that across the most part of the interval (0,1) the relaxation time is close to a constant value  $\tau_0$ , whereas at  $S_*$  and  $S^*$  it goes to zero and infinity, respectively. Therefore, at large  $t$ , on a major portion of the interval of water penetration, the actual instantaneous saturation exceeds the threshold, above which the relaxation time is equal to a constant value  $\tau_0$ . In this case, the cumulative oil recovery through the inlet face of the block can be expressed as

$$R(t) \approx V_0 \left( 1 - e^{-\frac{t}{\tau_0}} \right) \sqrt{\frac{t}{\tau_0}} \dots \dots \dots (25)$$

Here,  $R(t)$  is the dimensionless ratio of the volume of recovered oil and the initial volume of the oil contained in the block. The coefficient  $V_0$  was expressed through the parameters of the model. It depends on the phase relative permeabilities and viscosities, on the absolute permeability and porosity of the rock, on the inlet face area, on the relaxation time, and Leverett's function  $J$ . By virtue of Eq. 25, at  $t \rightarrow \infty$ , the oil recovery from the block is approximately proportional to the square root of time (i.e., the time scaling suggested by the classical model).

Furthermore, Eq. 25 has been verified against the results of laboratory measurements reported in Ref. 16. The detailed data were kindly provided to us by A.R. Kovscek, one of the authors of Ref. 16. Experiments were performed on samples obtained from near-surface diatomite formations near Lompoc, California. The samples were cut in a direction parallel to the bedding plane and shaped into cylinders with the diameters of 2.5 cm and the length of 9.5 cm. The porosity of the rock samples was about 70%; the absolute permeability was about 6 md. For imbibition experiments, the samples were dried and oil was pumped into the pore space. After fully saturating a sample with oil, water was circulated through one endcap while the other endcap was sealed. The oil recovered by countercurrent imbibition was removed by the flowing water.

We matched the measured fractional oil recovery vs. time using Eq. 25. Our fitting parameters were the relaxation time  $\tau_0$  and the coefficient  $V_0$ . In Fig. 4, the data points from different experiments collapse into a single curve based on formula (Eq. 25). The relaxation time  $\tau_0$  was estimated at about 8 seconds for imbibing a dry sample with no oil, at about 220 seconds for a sample filled with blandol, and at approximately 1,230 seconds for the water-decane pair. For comparison, the same data are plotted in Fig. 5 vs. the dimensionless time proposed in Ref. 16:

$$t_D = t \sqrt{\frac{k}{f} \frac{\gamma}{L^2}} \sqrt{\frac{k_{ro} k_{rw}}{\mu_o \mu_w}} \frac{1}{\sqrt{\frac{k_{ro} \mu_w}{k_{rw} \mu_o} + \sqrt{\frac{k_{rw} \mu_o}{k_{ro} \mu_w}}}} \dots \dots \dots (26)$$

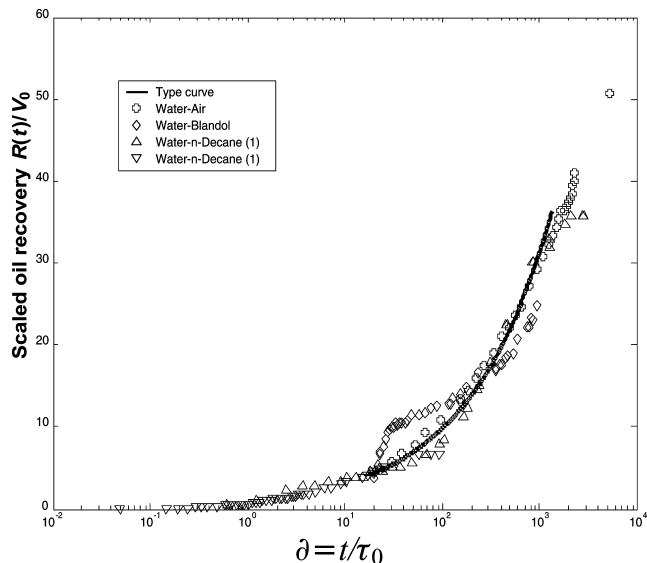


Fig. 4—Matching scaled oil recovery reported by Zhou *et al.*<sup>16</sup> The type curve corresponds to Eq. 25. The time scale is  $t/\tau_0$ , where  $\tau_0$  is the estimated redistribution time.

Here,  $L$  is a characteristic length scale of the sample. For scaling, some characteristic values of the parameters depending on water saturation were used in Ref. 16.

**Discussion.** In concluding this section, we want to review other studies of the problem of capillary imbibition. Laboratory experiments with spontaneous imbibition of various rock samples were broadly reported in the literature. In Refs. 17 and 18, the scaling laws developed from the classical model in Ref. 19 were used to interpret the laboratory coreflood experiments at a reservoir length scale. However, the oil recovery curves in countercurrent imbibition experiments did not follow the classical square root of time rule, especially at early times (see for instance Ref. 20). This phenomenon was investigated experimentally and confirmed in numerous works (see Refs. 16, and 21 through 26). As we have mentioned above, the nonequilibrium effects become reduced if the fluid viscosities are low and the laboratory sample permeability is high. This is confirmed by imbibition experiments of dry cement pastes.<sup>27</sup>

The influence of temperature and chemical additives on oil recovery in countercurrent-imbibition was studied experimentally

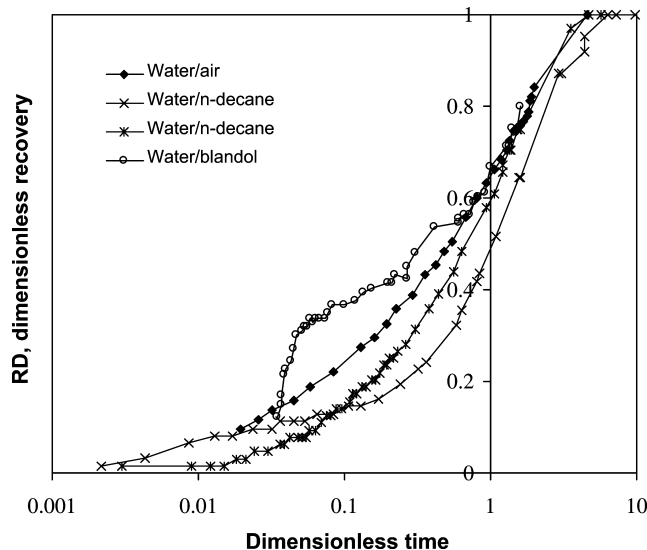


Fig. 5—The data curves from Fig. 4 plotted vs. the dimensionless time (Eq. 26) proposed in Ref. 16.

in Refs. 28 and 29. In Ref. 30, the imbibition delay caused by the wettability alteration was studied experimentally. In Ref. 31, imbibition was studied in situations where the process was not 1D.

Within the model discussed in this paper, the deviation of the oil recovery curve from the classical square root of time rule is caused by the nonequilibrium nature of spontaneous imbibition. Attempts to model and numerically simulate this phenomenon based on the classical model were also undertaken by various researchers. Numerical studies of countercurrent imbibition were started in early works.<sup>32,33</sup> In Ref. 34, the numerical simulations were extended to 2D flow. All these papers were based on the classical approach. A comparative survey of other works, also based on the classical model with minor variations, was presented in Ref. 35. In Refs. 36 and 37, a “delayed” inlet boundary condition was introduced that allowed matching the laboratory data using the classical approach. In these papers, this boundary condition was derived from an empirical relationship proposed in Ref. 38. The same approach made possible good matching of the data in Ref. 39. In fact, this “delayed” boundary condition was derived from the nonequilibrium spontaneous imbibition model in Ref. 6, where the exponential decay rate was explicitly linked to the relaxation time.

A system of equations characterizing multiphase flow in porous media was obtained in Ref. 40. This system is incomplete; however, analyzing the pore-scale thermodynamics of consequences of the fast-changing saturations, it was recognized that at transient conditions the steady-state capillary pressure has to be modified by a term proportional to the saturation rate change. The development of this model was continued in Refs. 41 through 43, and a mathematical investigation was performed in Ref. 44. Formally, the last equation (Eqs. 5 and 10) can be related to the model proposed in these subsequent works, but they do not take into account the changes of relative permeabilities. Also, neither a characteristic redistribution time nor effective saturation were introduced in Ref. 40, so the model introduced there and the model presented in this paper are fundamentally different.

In Ref. 24, a drag force caused by simultaneous flow of two fluids in a rock was incorporated into the Darcy’s law. As a result, the permeability coefficient became a tensor even for an isotropic rock. Although the numerical simulations based on this assumption matched the data measured in individual countercurrent imbibition experiments, the universality of the cross terms in the permeability tensor was not established in Ref. 24.

### Forced Water-Oil Displacement

The mathematical model of forced water-oil displacement taking into account nonequilibrium effects was presented in Ref. 5, and a complete, rigorous mathematical investigation was performed in Ref. 7. An important special case in which the direct capillary effects can be neglected (but not in relative permeabilities) was rigorously investigated in Ref. 45.

The most important manifestation of the nonequilibrium effects is as follows. In the classical paper by Rapoport and Leas,<sup>46</sup> the concept of “stabilized zone” around the water-oil displacement front was introduced. The stabilized zone is a quasisteady region around the displacement front (a region of sharp variation of the water saturation), which determines the structure of the transition between injected water and oil. In Ref. 47, the stabilized zone was obtained as a rigorous solution of the traveling-wave type of the equation of the Muskat-Leverett model.

A paradoxical property of the results obtained in Refs. 46 and 47 was that the width  $\Delta$  of the stabilized zone where the saturation sharply changes appears to be decreasing inversely proportional to the displacement speed  $v$  (Fig. 6a). This result seems to be unnatural. Taking into account the nonequilibrium effects (the redistribution time) leads however to a different and more natural result.<sup>4,5</sup> The stabilized zone around the displacement front is also obtained, but its width, with growing velocity, at first decreases, then reaches a certain minimum, and after that starts to increase (Fig. 6b). In the limiting case of large displacement speeds, when the capillary pressure become negligible (but the capillary effects in relative permeabilities are still preserved), the width of the

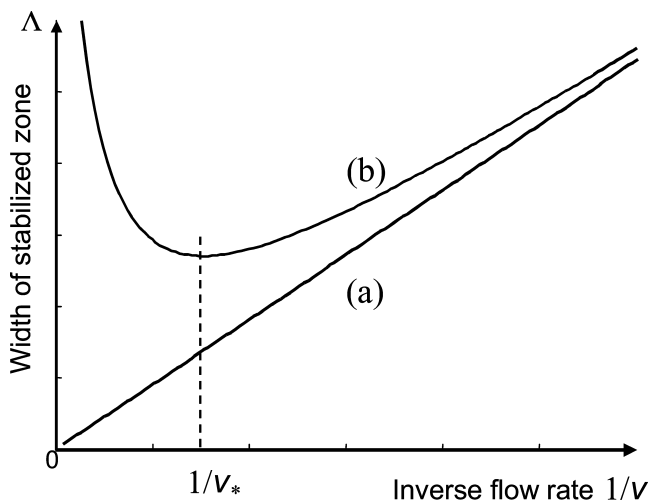


Fig. 6—The width of stabilized zone is proportional to  $1/v$  according to the Rapoport-Leas model (a) and has a global minimum at a certain  $v=v^*$  according to the nonequilibrium model (b).

stabilized zone increases linearly with the displacement speed until it becomes comparable with the distance between the wells, and the stabilized zone disappears.

### Conclusions

An overview of the current state of the theory of nonequilibrium water-oil (or, more generally, wetting–nonwetting fluid) displacement has been presented. The nonequilibrium effects become important when the characteristic transition times are comparable with, or smaller than, the time needed for the redistribution of the fluids along their flow paths. Two practically important processes of this type have been considered: Spontaneous countercurrent imbibition, and flow at the front of the forced water-oil displacement. A rigorous presentation of the respective physical phenomena and their mathematical models has been performed. The results of a comparison with laboratory data have been presented. The effects of dependence of the relaxation time on the water saturation have been discussed, and the corresponding modification of the problem formulation presented.

To summarize, the discussion of nonequilibrium effects in water-oil displacement presented in this paper shows that these effects are of primary importance for countercurrent capillary imbibition and forced water-oil displacement.

### Nomenclature

- $a^2$  = diffusivity coefficient,  $L^2/t$
- $F$  = fractional flow function, dimensionless
- $g$  = dimensionless function
- $J$  = Leverett’s function, dimensionless
- $k$  = absolute permeability of the rock,  $L^2$
- $k_{ro}$  = relative permeability to oil, dimensionless
- $k_{rw}$  = relative permeability to water, dimensionless
- $L$  = characteristic length,  $L$
- $p_o$  = oil pressure,  $m/Lt^2$
- $p_w$  = water pressure,  $m/Lt^2$
- $R(t)$  = fractional cumulative oil recovery
- $S$  = actual water saturation, dimensionless
- $S_0$  = initial water saturation, dimensionless
- $t$  = time,  $t$
- $t_D$  = dimensionless time
- $T$  = process characteristic time,  $t$
- $u$  = total flux,  $L/t$
- $u_o$  = oil flux,  $L/t$
- $u_w$  = water flux,  $L/t$
- $v$  = water-oil front velocity,  $L/t$
- $V_0$  = dimensionless volume

$\gamma$  = oil-water interface surface tension, m/t<sup>2</sup>  
 $\varepsilon_N$  = dimensionless time  
 $\eta$  = effective water saturation, dimensionless  
 $\eta_0$  = initial effective water saturation, dimensionless  
 $\Lambda$  = the width of stabilized zone, L  
 $\mu$  = the ratio  $\mu_o/\mu_w$ , dimensionless  
 $\mu_o$  = oil viscosity, m/Lt  
 $\mu_w$  = water viscosity, m/Lt  
 $\tau$  = redistribution time, t  
 $\phi$  = rock porosity, dimensionless  
 $\Phi$  = dimensionless function  
 $X$  = dimensionless function  
 $\Psi$  = dimensionless function  
 $\Omega$  = a domain in a porous medium

## Acknowledgments

We thank A. Kovscek for providing experimental data. This work was supported by the Laboratory Directed Research and Development Program of Lawrence Berkeley Natl. Laboratory under U.S. DOE Contract No. DE-AC03-76SF00098.

## References

- Muskat, M. and Meres, M.W.: "The Flow of Heterogeneous Fluids Through Porous Media," *Physics* (September 1936) **7**, 346.
- Wyckoff, R.D. and Botset, H.G.: "The Flow of Gas-Liquid Mixtures through Unconsolidated Sands," *Physics* (September 1936) **7**, 325.
- Leverett, M.C.: "Flow of Oil-Water Mixtures Through Unconsolidated Sands," *Trans., AIME* (1939) 381, **132**.
- Barenblatt, G.I.: "Filtration of Two Nonmixing Fluids in a Homogeneous Porous Medium," *Soviet Academy Izvestia. Mechanics of Gas and Fluids* (1971) **5**, 857.
- Barenblatt, G.I. and Vinnichenko, A.P.: "Non-Equilibrium Seepage of Immiscible Fluids," *Advances in Mechanics* (in Russian) (1980) **3**, No. 3, 35.
- Barenblatt, G.I. and Gilman, A.A.: "A Mathematical Model of Non-Equilibrium Countercurrent Capillary Imbibition," *Eng. Phys. Journal* (1987) **52**, No. 3, 46.
- Barenblatt, G.I., Garcia-Azozero, J., DePablo, A., and Vazquez, J.L.: "Mathematical Model of the Non-Equilibrium Water-Oil Displacement in Porous Strata," *Applicable Analysis* (1997) **65**, 19.
- Barenblatt, G.I., Garcia-Azozero, J., DePablo, A., and Vazquez, J.L.: "The mathematical model for two-phase non-equilibrium flows in porous media." In *Mathematical modeling of flow through porous media*, Scientific Media, New York City (1996).
- Barenblatt, G.I., Entov, V.M., and Ryzhik, V.M.: *Theory of Fluid Flows through Natural Rocks*, Kluwer Academic Publishers, Dordrecht, The Netherlands (1990).
- Patzek, T.W.: "Verification of a Complete Pore Network Simulator of Drainage and Imbibition," *SPEJ* (June 2001) 144.
- Bocharov, O.B., Vitovskii, O.V., and Kuznetsov, V.V.: "The Structure of Saturation Discontinuities at Nonequilibrium Displacement in Porous Media," *Fluid Dynamics* (1991) **6**, 891.
- Bocharov, O.B., Kuznetsov, V.V., and Chekhovich, Y.V.: "Numerical Study of the Nonequilibrium Filtration of Immiscible Liquids," *J. Engineering Physics* (1989) **57**, No. 1, 803.
- Gilman, A.: "Non-Equilibrium Imbibition of a Porous Rock," *European Journal of Applied Mathematics* (1996) **7**, 43.
- Ryzhik, V.M.: "On Capillary Imbibition by Water of an Oil-Saturated Reservoir," *Izv AN SSSR. Mekh i Mash.* (1960) **2**, 149.
- Silin, D.B. and Patzek, T.W.: "On Barenblatt's Model of Spontaneous Countercurrent Imbibition," *Transport in Porous Media* (2004) in press.
- Zhou, D., Jia, L., Kamath, J., and Kovscek, A.R.: "An Investigation of Counter-Current Imbibition Processes in Diatomite," paper SPE 68837 presented at the 2001 SPE Western Regional Meeting, Bakersfield, California, 26–30 March.
- Graham, J.W. and Richardson, J.G.: "Theory and Application of Imbibition Phenomena in Recovery of Oil," *Trans., AIME* (1959) **216**, 377.
- Mattax, C.C. and Kyte, J.R.: "Imbibition Oil Recovery From Fractured, Water-Drive Reservoir," *Trans., AIME* (1962) **225**, 177.
- Rapoport, L.A.: "Scaling Laws for Use in Design and Operation of Water-Oil Flow Models," *Trans., AIME* (1955) **204**, 143.
- Parsons, R.W. and Chaney, P.R.: "Imbibition Model Studies on Water-Wet Carbonate Rocks," *SPEJ* (March 1964) 26.
- Du Prey, L.E.: "Gravity and Capillary Effects on Imbibition in Porous Media," *SPEJ* (June 1978) 195.
- Hamon, G. and Vidal, J.: "Scaling-Up the Capillary Imbibition Process From Laboratory Experiments on Homogeneous and Heterogeneous Samples," paper SPE 15852 presented at the 1986 SPE European Petroleum Conference, London, 20–22 October.
- Cuic, L., Bourbiaux, B., and Kalaydjian, F.: "Oil Recovery by Imbibition in Low-Permeability Chalk," *SPEFE* (September 1994) 200.
- Bourbiaux, B.J. and Kalaydjian, F.J.: "Experimental Study of Cocurrent and Countercurrent Flows in Natural Porous Media," *SPEFE* (August 1990) 361; *Trans., AIME*, **289**.
- Milner, J. and Øxnevad, I.E.I.: "Spontaneous Imbibition in Two Different Chalk Facies," *Petroleum Geoscience* (1996) **2**, 231.
- Zhang, X., Morrow, N.R., and Ma, S.: "Experimental Verification of a Modified Scaling Group for Spontaneous Imbibition," *SPEFE* (November 1996) 280.
- Leventis, A., Verganelakis, D.A., Halse, M.R., Webber, J.B., and Strange, J.H.: "Capillary Imbibition and Pore Characterization in Cement Pastes," *Transport in Porous Media* (2000) **39**, 143.
- Balepin, A.A., Zheltov, Y.P., and Al Issa, V.A.K.: "Experimental Investigation of Countercurrent Capillary Imbibition (CCI) in Natural Rock Samples at Various Temperatures," *Fluid Dynamics* (1990) **2**, No. 3, 379.
- Austad, T., Matre, B., Milner, J., Sævaareid, A., and Øyno, L.: "Chemical Flooding of Oil Reservoirs. 8. Spontaneous Oil Expulsion from Oil- and Water-Wet Low Permeable Chalk Material by Imbibition of Aqueous Surfactant Solutions," *Colloid and Surfaces. A: Physicochemical and Engineering Aspects* (1998) **137**, 117.
- Firoozabadi, A. and Tang, G.-Q.: "Effects of Pressure Gradient and Initial Water Saturation on Water Injection in Water-Wet and Mixed-Wet Fractured Porous Media," *SPEFE* (December 2001) 516.
- Rangel-German, E.R. and Kovscek, A.R.: "Experimental and analytical study of multidimensional imbibition in fractured porous media," *Journal of Petroleum Science and Engineering* (2002) **36**, 45.
- Blair, P.M.: "Calculation of Oil Displacement by Countercurrent Water Imbibition," *SPEJ* (September 1964) 195; *Trans., AIME*, **231**.
- Shalimov, B.V. and Shvidler, M.I.: "On Co-Current and Countercurrent Capillary Imbibition in Porous Media," *Izv. AN SSSR. Mekh. Zhidk i Gasa* (1974) **2**, 165.
- Pooladi-Darvish, M. and Firoozabadi, A.: "Cocurrent and Countercurrent Imbibition in a Water-Wet Matrix Block," *SPEJ* (March 2000) 3.
- Reis, J. and Cil, M.: "Analytical Models for Capillary Imbibition: Multidimensional Matrix Blocks," *In Situ* (2000) **24**, No. 1, 79.
- Bech, N., Jensen, O.K., and Nielsen, B.: "Modeling of Gravity-Imbibition and Gravity-Drainage Processes: Analytic and Numerical Solutions," *SPEFE* (February 1991) 129.
- Kazemi, H., Gilman, J.R., and Elsharkawy, A.M.: "Analytical and Numerical Solution of Oil Recovery from Fractured Reservoir With Empirical Transfer Functions," *SPEFE* (May 1992) 219.
- Aronofsky, J.S., Massé, L., and Natanson, S.G.: "A Model for the Mechanism of Oil Recovery From the Porous Matrix Due to Water Invasion in Fractured Reservoirs," *Trans., AIME* (1958) **213**, 17.
- Ma, S., Morrow, N.R., and Zhang, X.: "Generalized Scaling of Spontaneous Imbibition Data for Strongly Water-Wet Systems," *Journal of Petroleum Science and Engineering* (1997) **18**, 165.
- Marle, C.-M.: "From the Pore Scale to the Macroscopic Scale: Equations Governing Multiphase Fluid Flow through Porous Media," in *Euromech 143*, Balkema A.A., Rotterdam, The Netherlands (1981).
- Kalaydjian, F.: "A Macroscopic Description of Multiphase Flow in Porous Media Involving Spacetime Evolution of Fluid/Fluid Interface," *Transport in Porous Media* (1987) **2**, 537.
- Pavone, D.: "Macroscopic equations derived from space averaging for immiscible two-phase flow in porous media," *Revue de l'inst. Francaise du petrole* (1989) **44**, No. 1, 29.

43. Hassanizadeh, S.M. and Gray, W.G.: "Thermodynamic Basis of Capillary Pressure in Porous Media," *Water Resources Research* (1993) **29**, No. 10, 3389.
44. Cuesta, C., van Duijn, C.J., and Hushof, J.: "Infiltration in Porous Media with Dynamic Capillary Pressure: Traveling Waves," *European Journal of Applied Mathematics* (2000) **11**, 381.
45. Natalini, R. and Tesei, A.: "On the Barenblatt model for non-equilibrium two phase flow in porous media," *Archive for Rational Mechanics and Analysis* (1999) **150**, No. 4, 349.
46. Rapoport, L.A. and Leas, W.J.: "Properties of Linear Waterfloods," *Trans., AIME* (1953) **198**, 139.
47. Ryzhik, V.M., Charny, I.A., and Zhung-Tsang, C.: "On Certain Exact Solutions of Equations of Non-Stationary Filtration of Two Fluids," *Izv AN SSSR. Mekh i Mash.* (1961) **1**.

**Grigory Isaakovich Barenblatt** graduated from the Dept. of Mechanics and Mathematics, Moscow State U. He has worked in the Inst. of Petroleum, Soviet Academy of Sciences, Moscow U.; and the Inst. of Oceanology, Soviet Academy of Sciences. He was the first recipient of the G. I. Taylor Chair of Fluid Mechanics at the U. of Cambridge. Barenblatt has been professor of mathematics at the U. of California, Berkeley, and Mathematician at Lawrence Berkeley Natl. Laboratory since 1997. He is a Foreign Member of the Royal Society of London and

American Academy of Arts and Sciences; Foreign Associate of the U.S. National Academy of Sciences and of the US National Academy of Engineering; member of the European Academy; and Laureate of the Modesto Panetti and Maxwell Prizes. Barenblatt holds MS, PhD, and DSc degrees from the Moscow State U. **Tad W. Patzek** is a professor of geoen지니어ing at the Dept. of Civil and Environmental Engineering at U.C. Berkeley. e-mail: patzek@patzek.berkeley.edu. Patzek teaches courses in mathematical modeling of flow phenomena in permeable rocks at micro- and macroscale, and an introductory course in computing and computer science. Patzek's research combines analytical and numerical modeling of earth flow systems with measurement, parameter estimation, and control of these systems. He also works on quantifying long-term sustainability. Patzek holds MS and PhD degrees in chemical engineering from the Silesian Technical U., Gliwice, Poland. **Dmitriy B. Silin** is a geological scientist at the Earth Sciences Div. of Ernest Orlando Lawrence Berkeley Natl. Laboratory. e-mail: Dsilin@lbl.gov. For 5 years he was an associate professor at M.V. Lomonosov Moscow State U. His research interests include analytical, asymptotic, and numerical methods in mathematical models in earth sciences, microscopic image analysis and pore-network flow modeling, and optimization methods. He holds MS and PhD degrees in applied mathematics from the Dept. of Computational Mathematics and Cybernetics at Moscow State U.