

Interrelationship of Wettability, Initial Water Saturation, Aging Time, and Oil Recovery by Spontaneous Imbibition and Waterflooding

Xianmin Zhou,* SPE, and N.R. Morrow, SPE, U. of Wyoming, and Shouxiang Ma,** SPE, Western Research Inst.

Summary

Previous studies of crude oil/brine/rock (COBR) and related systems showed that wettability and its effect on oil recovery depend on numerous complex interactions. In the present work, the wettability of COBR systems prepared using Prudhoe Bay crude oil, a synthetic formation brine, and Berea Sandstone was varied by systematic change in initial water saturation and length of aging time at reservoir temperature (88°C). All displacement tests were run at ambient temperature. Various degrees of water wetness were achieved and quantified by a modified Amott wettability index to water, the relative pseudowork of imbibition, and a newly defined apparent advancing dynamic contact angle.

Pairs of spontaneous imbibition (oil recovery by spontaneous imbibition of water) and waterflood (oil recovery vs. pore volumes of water injected) curves were measured for each of the induced wetting states. Several trends were observed. Imbibition rate, and hence, water wetness, decreased with increase in aging time and with decrease in initial water saturation. Breakthrough recoveries and final oil recovery by waterflooding increased with decrease in water wetness. Correlations between water wetness and oil recovery by waterflooding and spontaneous imbibition are presented.

Introduction

Wettability is an important factor in the performance of waterfloods.¹ Final recovery of oil by waterflood is expressed in this paper as R_{wf} , the fraction of the original oil in place (OOIP) recovered. Review of the literature showed variations in R_{wf} could be very large and were strongly dependent on how wettability was established.^{2,3} The wettability state induced by adsorption in the presence of an initial water saturation S_{wi} is referred to as mixed. The main characteristic of mixed wettability is that only the areas of rock surface exposed to crude oil undergo changes in wetting that are significant to the displacement process. The term mixed wettability was adopted by Salathiel⁴ to describe this form of wettability distribution with strongly water-wet and strongly oil-wet surfaces. However, a wide range of wetting states can be induced by contact with crude oil and adsorption of oil components does not necessarily result in a *strongly* oil-wet surface. Nevertheless, the geometric description of mixed wettability envisaged by Salathiel is still appropriate and in this paper is applied to all possible types of mixed wetting that depend on the location of bulk water in the rock at the time of adsorption. The term bulk water is used here to identify water retained by capillary forces as distinct from water retained by adsorption at solid surfaces as thin films. The fraction of S_{wi} existing as surface films is very small except at extremely low water saturations.

Jadhunandan and Morrow⁵ showed that wettability can be varied in Berea Sandstone by changing the conditions for adsorption

from crude oil. Variations in the crude oil/brine/rock (COBR) ensembles that were studied included the crude oil, brine, initial water saturation S_{wi} , aging temperature of the rock in crude oil T_a , and rate of flooding. The aging time t_a , was standardized at 10 days. From the results for over 50 waterfloods, a correlation was obtained between oil recovery and wettability defined by the Amott-Harvey wettability index^{6,7} I_{w-o} , with the oil recovery peaking at close to neutral wettability (see Fig. 1). For all wettability conditions below $I_{w-o}=0.9$, with two exceptions, produced water was accompanied by a small and decreasing fraction of oil. This mode of production was postulated by Salathiel⁴ to result from a bi-continuous distribution of oil and water within the rock.

Jadhunandan and Morrow⁸ also investigated factors influencing the rate of oil recovery by spontaneous imbibition (SI). Two sets of imbibition and waterflood (WF) data measured under comparable conditions showed that the systems with the lower, but still finite, imbibition rates gave higher waterflood oil recoveries. Determination of the circumstances under which there are systematic relationships between oil recovery by spontaneous imbibition and by forced displacement (waterflooding) would be of special value in evaluating possible methods of improved oil recovery.

The objective of the present work was to obtain data for a COBR combination in which wettability was varied systematically. The selected system was Prudhoe Bay crude oil/synthetic formation brine/Berea Sandstone. In laboratory studies related to prediction of reservoir performance, choice of t_a is mainly governed by the need to provide sufficient time to achieve adsorption equilibrium. This condition is sometimes assumed to match the reservoir wettability. Values of t_a on the order of two to six weeks are commonly adopted.^{9,10} For investigation of relationships between wettability and oil recovery, variation of t_a provides a convenient method of obtaining systems with graded wettability,¹¹ while holding other variables constant. This approach was used in the present work to obtain 23 sets of spontaneous imbibition and waterflood data for different t_a at three levels of S_{wi} (nominally, 15, 20, and 25%).

Special attention is given to using spontaneous imbibition curves (oil recovery vs. imbibition time) to quantify wettability. This requires that the effect of wettability on imbibition rate be separated from the effect of interfacial tension, liquid viscosities, differences in permeability and porosity, and the size, shape, and boundary conditions of the core samples. These effects have been correlated for very strongly water-wet conditions by a definition of dimensionless time.¹² Reduction in imbibition rate relative to the correlation for very strongly water-wet conditions can result from decrease in water wetness. In the present work, relationships are presented between wettability and oil recovery by spontaneous imbibition and waterflooding.

Experiments

Fluids. A Prudhoe Bay, Alaska, crude oil (A'93) was used as the oil phase. The crude oil was evacuated before use to reduce the possibility of gas evolution during the course of an experiment. The evacuated crude oil had a viscosity μ_o of 39.25 cP and density ρ_o of 0.895 g/cc at 25°C. A refined oil, Soltrol 220, $\mu_o = 3.98$ cP, was used to obtain a set of imbibition and waterflood data for very strongly water-wet conditions. A synthetic formation (SF) brine was prepared: 21.3 g/L NaCl, 0.6 g/L CaCl₂·6H₂O, 0.1

*Now at Westport Technology Center Intl.

**Now at Exxon Production Research Co.

Copyright © 2000 Society of Petroleum Engineers

This paper (SPE 62507) was revised for publication from paper SPE 35436, presented at the 1996 SPE/DOE Improved Oil Recovery Symposium held in Tulsa, Oklahoma, 21–24 April. Original manuscript received for review 22 April 1996. Revised manuscript received 14 January 2000. Manuscript peer approved 24 January 2000.

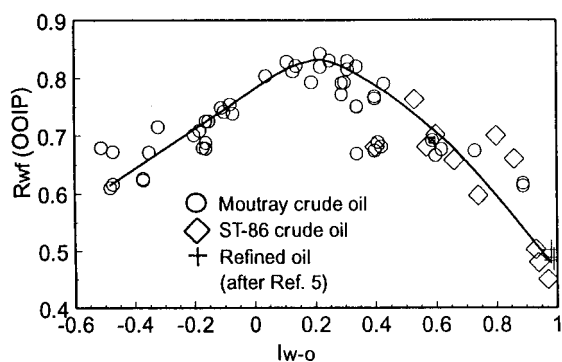


Fig. 1—Waterflooding recovery at 20 pore volumes (PV) of brine injection vs. Amott-Harvey wettability index for different oils.

g/L KCl, 0.2 g/L $MgCl_2 \cdot 6H_2O$. The brine, with viscosity μ_w of 0.967 cP and density ρ_w of 1.012 g/cc at 25°C was evacuated for about 4 hours before use. The interfacial tension between the brine and the evacuated crude oil was $\sigma = 24.2$ dyn/cm measured by du Nouy ring tensiometer. The ring was flamed and immersed in brine. Crude oil was poured on the brine and the tension was measured for the ring passing from the brine to the oil phase.

Preparation and Properties of Core Samples. A total of 41 core plugs were cut from several blocks of Berea Sandstone. Diameters and lengths of the cores were in the range of 3.80 to 3.82 and 6.4 to 7.8 cm, respectively. After cutting the plugs, the core samples were washed and dried at ambient temperature for two days. The cores were then dried in an oven at 105°C for at least two days and cooled in a vacuum chamber. Nitrogen gas permeability k_g of the cores was measured using a Hassler-type core holder at a confining pressure of 300 psi.

The dry core samples were vacuumed and saturated with the SF brine. Porosity ϕ was determined from the change in weight. The saturated cores were left immersed in brine for about 10 days to establish ionic equilibrium between the rock constituents and the brine. The original brine was then displaced with about 10 pore volumes (PV) of fresh brine during the course of measuring brine permeability k_b . Values of porosity, gas permeability, and brine permeability are listed in Table 1.

Initial Water Saturation. The brine was displaced by 3 to 5 PV of the A'93 crude oil at 25 to 30 psi pressure drop to give nominal initial water saturations S_{wi} of 25%. With the oil injection pressure reduced to 20 to 25 psi and the amount of oil injected increased to 5 to 10 PV, S_{wi} values of close to 20% could be obtained consistently. Initial water saturations of about 15% were established by oilflooding at 5 psi initially. The pressure drop was then gradually increased up to 55 psi. Oil flow was continued for up to 15 pore volumes until the required water content was established. Initial water saturations for each experiment are listed in Table 1. During oilflooding, the direction of oil flow was reversed to alleviate possible end effects.

Core Sample Aging. After establishing an initial water saturation, the core samples were removed from the core holder, immersed in the crude oil, and aged at 88°C for 1 to 240 hours (Table 1). The beakers were covered with aluminum foil and sealed with a high-temperature glue to minimize loss of water and light ends from the crude oil during the aging period. After aging, cores were allowed to cool for at least 6 hours. Comparison of core weight before and after aging showed essentially no change in initial water saturation. The oil that was in the core during aging was displaced with 8 to 10 PV of evaporated stock crude oil at 10 to 15 psi injection pressure prior to making the spontaneous imbibition and waterflood measurements. Tests were also run on

cores for which there was no aging at elevated temperature and contact time with the crude oil before initiation of the test was minimal (nominal aging time of 0 hours).

Spontaneous Imbibition. The rates of spontaneous imbibition into the aged cores were measured at ambient temperature. A core was suspended in degassed brine by a monofilament line attached to an electronic balance (accuracy to 0.0001 g). The change in weight of the core suspended under brine was recorded vs. time. The amount of oil expelled was determined gravimetrically. Before weighing, expelled oil that was still attached to the core was removed with a polytetrafluoroethylene (Teflon) rod.

Waterfloods. The waterflood apparatus used in this study was designed for either constant rate or constant pressure waterfloods at ambient temperature. All of the waterflood tests were performed at slow rates using a constant pressure drop of 5 psi. Oil production vs. time was determined from volumetric measurements. The waterflood was stopped after 4 to 15 PV of brine injection when the water-oil ratio was greater than 99 to 1. This criteria provided an operational definition for final waterflood recovery R_{wf} .

Duplicate and Reused Core Plugs. For core samples with $S_{wi} \approx 25\%$, after completion of the spontaneous imbibition tests, the core samples were flushed with about 5 to 10 PV of the crude oil at 30 psi to re-establish the initial water saturation. The duration of oilflooding and the magnitude of the displacement pressure depended on the amount of water production. First and second initial water saturations agreed within 1%, and so for initial water saturations of 25%, core plugs were re-used for the waterflood measurements. Difficulty was encountered in re-establishing initial water saturations of 20 and 15%. Duplicate cores, one for spontaneous imbibition and the other for waterflood tests, were therefore used.

Results and Discussion

Imbibition and Waterflood Recovery Curves. Waterflood and imbibition results are presented for nominal values of initial water saturation S_{wi} of 15, 20, and 25% in Figs. 2, 3, and 4, respectively. Test conditions for 23 spontaneous imbibition tests and 27 waterfloods are summarized in Table 1. The aging times ranged from 1 to 240 hours.

Figs. 2a, 3a, and 4a show the effect of aging time on the relationships between oil recovery by imbibition R_{im} and imbibition time t . Imbibition rate decreases systematically with increase in aging time. Oil recovery by imbibition exhibited a maximum at 4 hours aging time for all three data sets. Increase in recovery by imbibition over that for very strongly water-wet conditions has been attributed to increased microscopic displacement efficiency.^{13,14}

The effect of aging time on the relationships between oil recovery by waterflooding R_{wf} and pore volumes of brine injected at initial water saturations of 15, 20, and 25% is shown in Figs. 2b, 3b, and 4b, respectively. Oil recovery by waterflooding increases with increase in aging time. Comparison of recovery curves by imbibition (Figs. 2a, 3a, and 4a) with recovery curves by waterflooding (Figs. 2b, 3b, and 4b) shows that, as imbibition rate decreases, oil recovery by waterflooding increases. Results for recovery of Soltrol 220 by waterflooding and A'93 crude oil for a nominal aging time of zero shows water breakthrough to be earlier for the crude oil. The crude oil was more viscous than Soltrol 220 by a factor of 10. Final recoveries were almost identical.

The effect of initial water saturation S_{wi} on oil recovery by imbibition and waterflooding is shown in Figs. 5a and 5b for an aging time of 240 hours. Both imbibition rate and final recovery by imbibition decrease with decrease in initial water saturation, whereas oil recovery by waterflooding increases.

Aging Time, Initial Water Saturation, and Oil Recovery. Oil recovery by waterflooding R_{wf} vs. oil recovery by imbibition R_{im} is shown in Fig. 6. At each initial water saturation, R_{im} passed through a maximum in recovery that corresponds to about 4 hours

TABLE 1—EXPERIMENTAL CONDITIONS, OIL RECOVERY, AND WETTABILITY

Core No.	ϕ (%)	k_g (md)	k_b (md)	S_{wi} (%)	t_a (hours)	Test	R (% DOIP)	I'_w	W_R	$\cos \Theta_{Ad}$
1	21.3	639	358	15.5	0	WF	41.6	0.73	0.35	0.25
2	22.2	666	359	16.0	1	WF	43.3
3	21.8	640	365	15.8	4	WF	47.4	0.70	0.16	0.027
4	21.3	661	366	16.3	6	WF	50.8
5	21.1	625	353	16.8	12	WF	52.2
6	21.3	625	354	15.0	24	WF	55.2
7	21.3	649	353	16.2	48	WF	58.0	0.50	0.051	0.0047
8	21.6	627	343	15.2	72	WF	60.2	0.42	0.021	0.0012
9	21.1	641	361	15.7	240	WF	63.1	0.19	0.0066	0.00074
10	21.7	667	360	15.4	0	SI	30.7	0.73	0.35	0.25
11	21.5	625	355	15.1	4	SI	33.3	0.70	0.16	0.027
12	21.4	614	365	15.9	48	SI	29.0	0.50	0.051	0.0047
13	22.5	585	300	16.9	72	SI	25.4	0.42	0.021	0.0012
14	21.7	617	364	15.4	240	SI	11.8	0.19	0.0066	0.00074
15	21.8	536	351	20.2	0	WF	38.2	0.84	0.37	0.3
16	22.5	540	373	19.7	1	WF	39.1	0.80	0.28	0.17
17	22.4	510	388	20.2	4	WF	41.1	0.92	0.19	0.036
18	22.4	601	372	21.5	6	WF	48.2	0.76	0.17	0.029
19	21.8	454	202	20.0	12	WF	50.7	0.70	0.12	0.012
20	21.9	467	194	20.3	24	WF	51.7	0.68	0.073	0.0053
21	21.4	467	216	20.0	48	WF	54.8	0.59	0.048	0.0046
22	21.6	525	216	19.8	72	WF	57.8	0.47	0.03	0.0018
23	21.8	566	355	21.2	240	WF	59.2	0.23	0.0093	0.00079
24	22.3	562	365	19.6	0	SI	32.1	0.84	0.37	0.3
25	22.0	500	363	19.0	1	SI	31.4	0.80	0.28	0.17
26	22.6	542	360	19.9	4	SI	37.7	0.92	0.19	0.036
27	22.0	532	336	20.5	6	SI	36.7	0.76	0.17	0.029
28	22.5	565	343	19.5	12	SI	35.3	0.70	0.12	0.012
29	22.6	594	374	19.5	24	SI	35.1	0.68	0.073	0.0053
30	22.0	522	357	20.4	48	SI	32.8	0.59	0.048	0.0046
31	22.3	581	367	20.1	72	SI	27.2	0.47	0.03	0.0018
32	21.8	566	355	20.6	240	SI	13.7	0.23	0.0093	0.00079
33	22.1	509	343	25.4	0	WF & SI	36.3	0.95	0.41	0.36
34	22.2	523	381	24.7	1	WF & SI	37.3	0.98	0.37	0.63
35	22.1	469	308	25.2	4	WF & SI	41.8	0.96	0.24	0.057
36	21.8	534	359	25.0	6	WF & SI	40.3	0.88	0.18	0.040
37	22.2	521	394	26.0	12	WF & SI	39.4	0.81	0.16	0.034
38	22.1	501	354	25.9	24	WF & SI	36.1	0.73	0.13	0.025
39	20.5	525	315	25.1	48	WF & SI	35.1	0.71	0.15	0.021
40	22.0	521	352	26.1	72	WF & SI	32.3	0.66	0.058	0.0080
41	20.8	552	347	25.1	240	WF & SI	24.2	0.45	0.031	0.00072

aging. At longer aging times, waterflood recovery increases with decrease in R_{im} .

Oil recovery by waterflooding at breakthrough R_{bt} is a key parameter in economic evaluation of waterfloods. R_{wf} may not be achievable in practice because the required volume of injected water is unrealistic. Effects of aging time t_a and initial water saturation S_{wi} on oil recovery by waterflooding at breakthrough R_{bt} and final waterflood oil recovery R_{wf} are summarized in Fig. 7. From Fig. 7 it can be seen that both R_{bt} and R_{wf} increase with aging time. The final oil recoveries by waterflooding, shown in Fig. 7, are compared in Fig. 8 with oil recovery by imbibition as a function of aging time.

Fig. 8 shows that, for any aging time, R_{im} decreases with decrease in initial water saturation. This decrease in R_{im} is consistent with reduced water wetness; as S_{wi} decreases, more of the rock surface is exposed to wettability alteration by adsorption from the crude oil. Quantitative analysis of the effect of exposed solid surface and contact angle on imbibition pressures has been presented for pores of polygonal cross sections.¹⁵

Scaling of Spontaneous Imbibition. Imbibition data for very strongly water-wet conditions can be scaled through use of a dimensionless time t_D defined by¹⁶

$$t_D = t \sqrt{\frac{k}{\phi}} \frac{\sigma}{\sqrt{\mu_w \mu_o}} \frac{1}{L_C^2}, \tag{1}$$

where L_C is a characteristic length determined by the size, shape, and boundary conditions of a sample;

$$L_C = \sqrt{\frac{V}{\sum_{i=1}^n \frac{A_i}{X_{Ai}}}}. \tag{2}$$

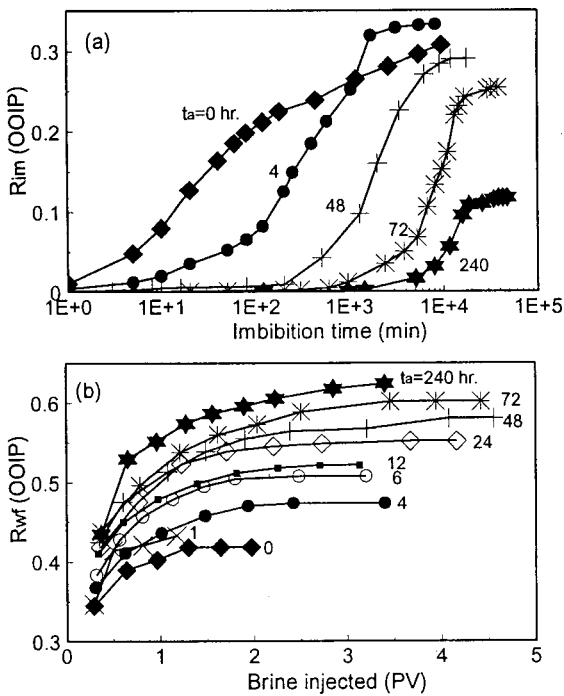


Fig. 2—(a) Oil recovery by imbibition vs. imbibition time and (b) oil recovery by waterflooding vs. pore volumes of brine injected for crude oil/brine/rock (COBR) systems at different aging times ($S_{wi}=15\%$).

V is the bulk volume of the core sample, A_i the area perpendicular to the i th imbibition direction, and X_{A_i} the distance from A_i to the no-flow boundary.

The driving force for imbibition is proportional to the interfacial tension σ . Applicability of the geometric mean of the water

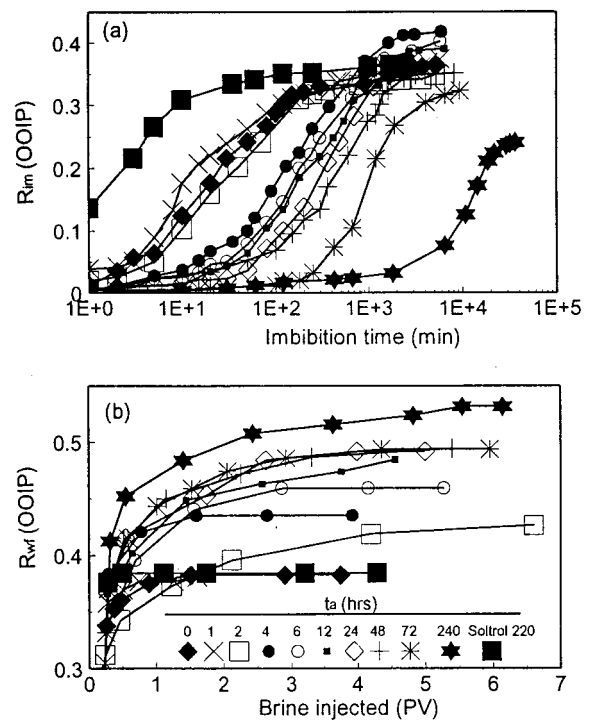


Fig. 4—(a) Oil recovery by imbibition vs. imbibition time and (b) oil recovery by waterflooding vs. pore volumes of brine injected for COBR systems at different aging times ($S_{wi}=25\%$).

and oil viscosities μ_{gm} for scaling of imbibition data was determined by experiment at very strongly water-wet conditions.¹⁶

The term $\sqrt{k/\phi}$ is proportional to a microscopic radius, usually known from the parallel bundle of equal cylindrical tubes model as the Leverett radius,¹⁷

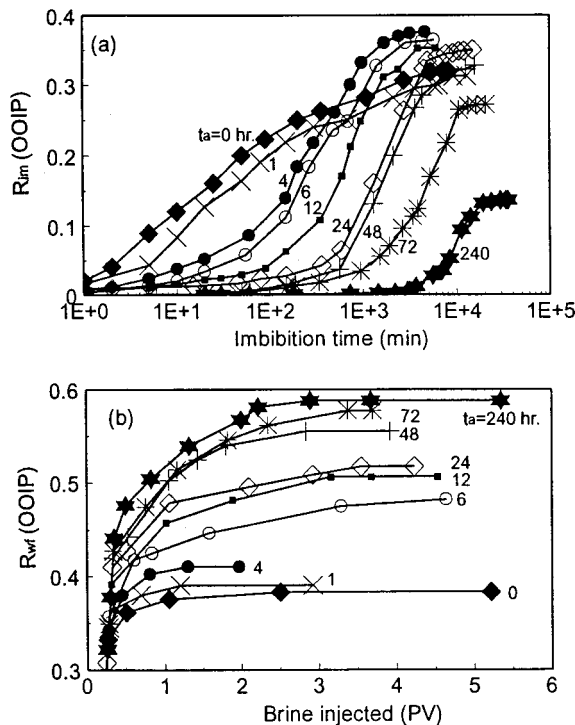


Fig. 3—(a) Oil recovery by imbibition vs. imbibition time and (b) oil recovery by waterflooding vs. pore volumes of brine injected for COBR systems at different aging times ($S_{wi}=20\%$).

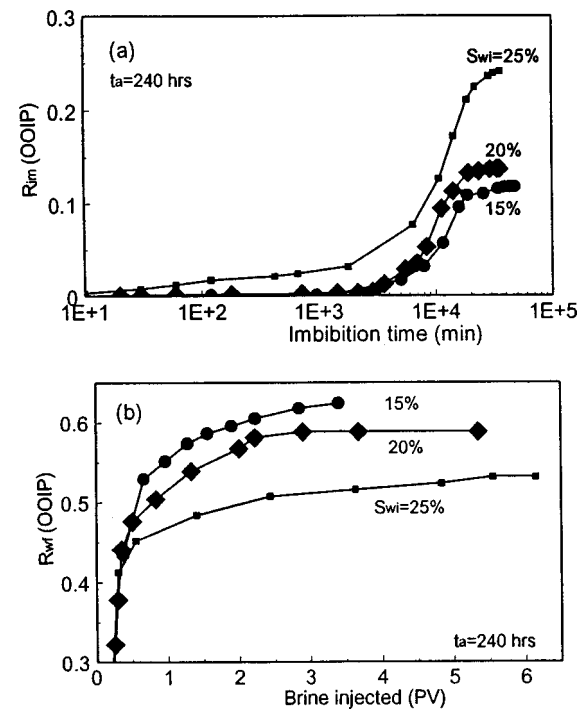


Fig. 5—Examples of the effect of initial water saturation on relationships between (a) oil recovery by imbibition vs. imbibition time and (b) oil recovery by waterflooding vs. PV of brine injected.

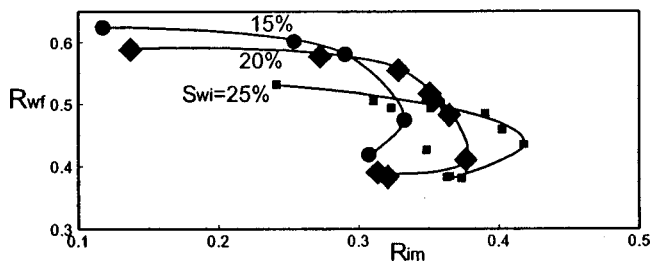


Fig. 6—Final waterflood oil recovery R_{wf} vs. final oil recovery by imbibition R_{im} for different initial water saturations.

$$r_L = \sqrt{\frac{8k}{\phi}} \quad (3)$$

Use of $\sqrt{k/\phi}$ in Eq. 1 provided close correlation of results for a limited number of types of strongly water-wet porous media.¹² This aspect of the correlation has been found to be satisfactory for a wider variety of rock types.

Imbibition data from Figs. 2 through 4 are presented as plots of oil recovery, normalized with respect to final recovery, vs. t_D (Fig. 9). A reference curve of R_{im} vs. t_D for very strongly water-wet (VSWW) Berea Sandstone cores of different sizes and boundary conditions¹⁸ is included in Fig. 9. Differences between this curve and the data identified by various aging times are ascribed mainly to wettability.

Characterization of Wettability. Amott Wettability Index. The Amott wettability index is defined as the ratio of saturation change by spontaneous imbibition ΔS_{im} to the total saturation change by both spontaneous imbibition and forced displacement ΔS_{wf} . The Amott wettability index to water I_w can then be expressed as

$$I_w = \frac{\Delta S_{im,w}}{\Delta S_{im,w} + \Delta S_{wf}} \quad (4)$$

Similarly the Amott wettability index to oil I_o is defined by

$$I_o = \frac{\Delta S_{im,o}}{\Delta S_{im,o} + \Delta S_{of}} \quad (5)$$

The difference between I_w and I_o gives the Amott-Harvey wettability index⁷

$$I_{w-o} = I_w - I_o \quad (6)$$

In the original method proposed by Amott, ΔS_{wf} was measured by centrifuging the core after allowing spontaneous imbibition for 20 hours. Jadhunandan and Morrow⁵ substituted waterflooding for the centrifuge step as proposed by Cuiec.^{10,19} Small variations in wettability, as operationally defined, that depend on the sequence of displacements have been discussed by Jadhunandan.²⁰ In the present work, recovery by imbibition and waterflooding were de-

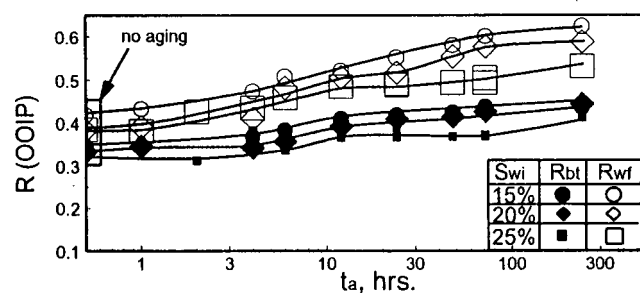


Fig. 7—Oil recovery by waterflooding at breakthrough R_{bt} and final waterflood oil recovery R_{wf} vs. aging time at initial water saturations of 15, 20, and 25%.

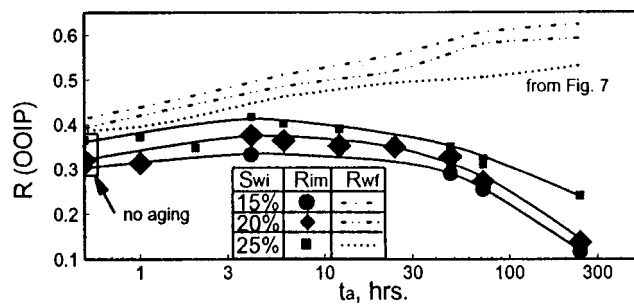


Fig. 8—Final oil recovery by imbibition R_{im} and final waterflood oil recovery R_{wf} vs. aging time at different initial water saturations.

termined separately. A slightly modified Amott index to water I'_w , as defined by the ratio of these two measurements, is given by

$$I'_w = \frac{R_{im,w}}{R_{wf}} \quad (7)$$

In this study, only the value of I'_w was measured. I'_o and I'_{w-o} can be defined by analogy with the definitions of I_o and I_{w-o} . From previous experience, displacement of water by spontaneous imbibition of oil, if observed at all, is very small except for very weakly water-wet systems.⁵ Thus, when I'_w is positive and not very low, I'_w and I'_{w-o} are equivalent and correspond closely to I_w and I_{w-o} .

Pseudowork of Imbibition. The application of spontaneous imbibition data to characterization of wettability has been summa-

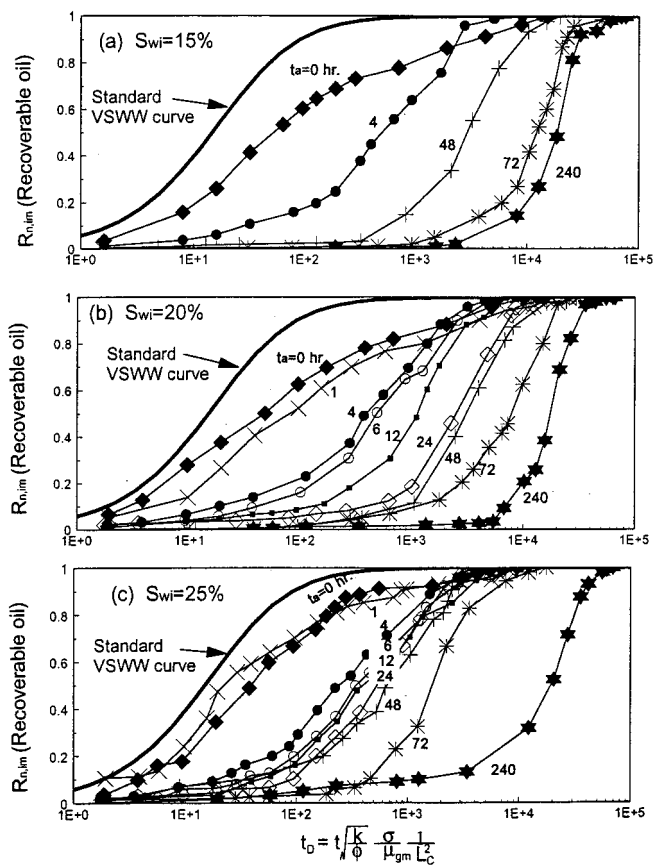


Fig. 9—Effect of aging time on relationships between normalized oil recovery by imbibition and dimensionless time for systems with nominal initial water saturations of (a) 15%, (b) 20%, and (c) 25%.

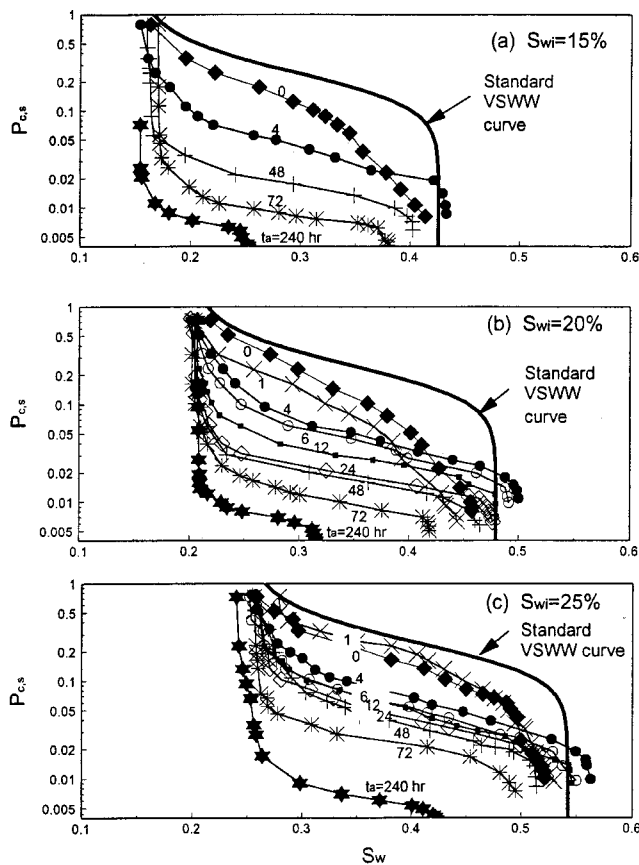


Fig. 10—Effect of aging time on pseudocapillary pressure curves for systems with initial water saturations of (a) 15%, (b) 20%, and (c) 25%.

alized by Cuiec.¹⁰ Ma *et al.*¹³ proposed a wettability index described as the relative pseudowork of imbibition W_R . The results in Fig. 9 show how the normalized rate of oil recovery by spontaneous imbibition decreases with increase in aging time. The rate of spontaneous imbibition depends on complex flow behavior but is basically dependent on imbibition capillary pressure and microscopic displacement efficiency. From consideration of theory and examination of experimental results, a dimensionless pseudoimbibition capillary pressure $P_{c,s}$ was defined¹³ from the approximate relationship:

$$P_{c,s} = at_D^{-1/2}, \quad (8)$$

where a is a constant. The pseudocapillary pressure indicates the effect of wettability on the relative rate of imbibition.

The $P_{c,s}$ vs. S_w curves, for systems with initial water saturation of 15, 20, and 25%, are shown in Fig. 10. The curves are based on changes in saturation under dynamic conditions and are obviously not directly related to standard capillary pressure imbibition curves. The pseudocapillary pressure curves for very strongly water-wet systems are also included in Fig. 10.

The area under each $P_{c,s}$ vs. S_w curve defines a pseudowork of imbibition W :

$$W = \int_{S_{wi}}^{1-S_{or,im}} P_{c,s} dS_w. \quad (9)$$

The ratio of W to the value of W for VSWW conditions, described as the relative pseudowork of imbibition, defines the wettability index W_R .

The relative pseudowork of imbibition W_R represents primarily the rate but also the extent of spontaneous imbibition. The value of W_R is strongly influenced by early time behavior.

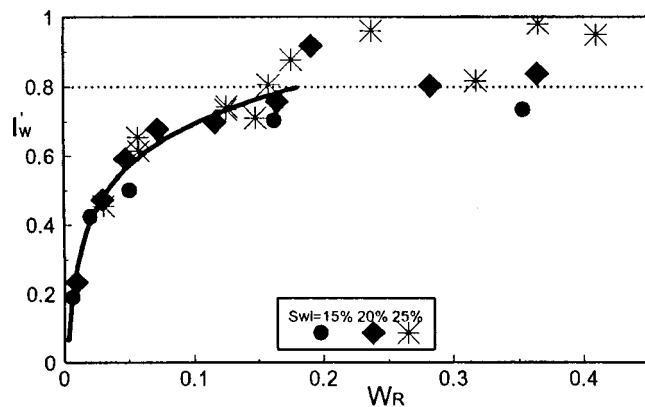


Fig. 11—Amott wettability index to water I'_w vs. relative pseudowork of imbibition W_R .

A plot of W_R vs. I'_w , presented in Fig. 11, shows a close correlation between I'_w and W_R for $I'_w < 0.8$. Amott wettability indices are determined by endpoint values for spontaneous imbibition without direct regard to imbibition rate. Use of a wettability index based on imbibition rate is especially advantageous for distinguishing degrees of water wetness for systems that are commonly given the single classification of very strongly water-wet when $I'_w > 0.8$.

Apparent Dynamic Advancing Contact Angle. A more direct approach to wettability characterization is to assume that imbibition rate is proportional to the cosine of an effective dynamic advancing contact angle Θ_{Ad} . This angle can be defined by analogy with the cylindrical tube model. Various approaches can be taken to determining Θ_{Ad} through comparison with recovery for very strongly water-wet conditions. If $\cos \Theta_{Ad}$ is defined by the ratio of the dimensionless time for one half of the total recovery by spontaneous imbibition for very strongly water-wet conditions to the corresponding t_D , then

$$\Theta_{Ad} = \cos^{-1} \frac{t_{D,vsww}(0.5)}{t_D(0.5)}. \quad (10)$$

Imbibition data are then automatically correlated at the $0.5R_{im}$ point by defining $t_{D\Theta}$ as

$$t_{D\Theta} = t_D \cos \Theta_{Ad} \quad (11)$$

or

$$t_{D\Theta} = t \sqrt{\frac{k}{\phi}} \frac{\sigma \cos \Theta_{Ad}}{\sqrt{\mu_w \mu_o}} \frac{1}{L_C}. \quad (12)$$

Differences in shapes of imbibition curves can be compared by use of $t_{D\Theta}$.

The relationship between Θ_{Ad} and contact angles operative within the rock is complex. Surface roughness, pore geometry, the minerals lining the relevant pore surfaces, and the location of the initial and invading brine will all contribute to determining local values of contact angle that result from interactions with the crude oil.

If curvatures and dynamic capillary pressure are defined, respectively, as

$$C_i \propto \frac{\cos \Theta_{Ad}}{r_L} \quad (13)$$

and

$$P_{cd} \propto \frac{\sigma \cos \Theta_{Ad}}{r_L}, \quad (14)$$

$t_{D\Theta}$ can be expressed as

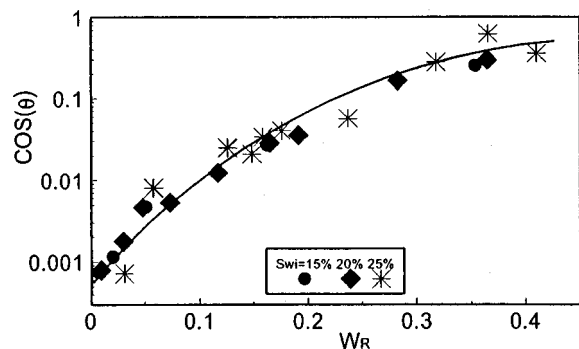


Fig. 12—Apparent dynamic advancing contact angle vs. relative pseudowork of imbibition.

$$t_{D\theta} \propto t \sqrt{\frac{k}{\phi} \frac{P_{cd}}{\sqrt{\mu_w \mu_o}} \frac{1}{L_C^2}} \quad (15)$$

The correlation shown in Fig. 12 between Θ_{Ad} , based on a single point, and W_R , based on the complete imbibition curve, shows that either of these related quantities can be used to characterize wettability for this data set.

For W_R below 0.20, all of the values of Θ_{Ad} are between 87° and 90° . This does not mean that the distribution of advancing contact angles at pore surfaces within the cores are necessarily close to these values. (This would obviously be a great coincidence.) Imbibition can occur even for angles well in excess of 90° provided water occupies the corners of the pores.¹⁵ The combined effect of the oil/water interfaces and the contact angle at the COBR three-phase line of contact determines the interface curvature, and hence, the capillary pressure that drives the imbibition process.

As Θ_{Ad} approaches 90° , it appears that imbibition depends on slow changes in wettability that accompany encroachment of the three-phase line of contact on surfaces that are overlain by crude oil. Decrease in oil/brine contact angles with time and complex phenomena related to adsorption/desorption of crude oil components have been reported.²¹⁻²³ As the interface advances, the interface curvature remains very close to zero, but the capillary pressure is still slightly positive. This explains why COBR imbibition capillary pressures determined by conventional methods are often observed to remain very close to zero over a wide range of increase in water saturation. It may also explain why the COBR imbibition process sometimes exhibits an induction period before oil recovery begins, as shown in Figs. 9a and 9b.

Aging Time, Initial Water Saturation, and Wettability. Aging Time. Fig. 13 shows how the relative pseudowork of imbibition W_R and the wettability index to water I'_w decrease with aging time t_a . For aging times of less than about 4 hours, I'_w is not sensitive to t_a , whereas W_R decreases sharply. At long aging times, I'_w is more sensitive than W_R .

Initial Water Saturation. Fig. 14 shows that W_R decreases with decrease in S_{wi} . It has been shown that relationships be-

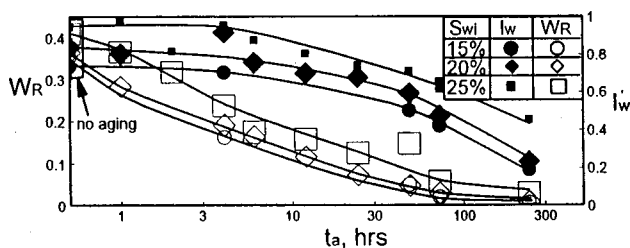


Fig. 13—Effect of initial water saturation on relationships between aging time and Amott wettability index to water and relative pseudowork of imbibition.

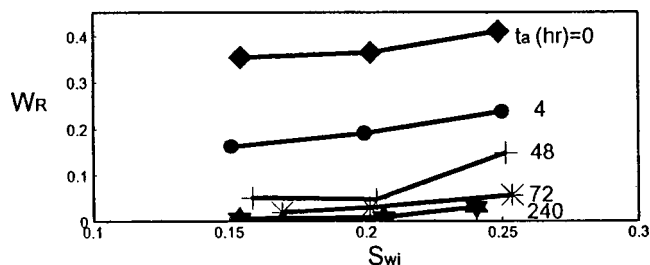


Fig. 14—Effect of aging time on relationships between initial water saturation and relative pseudowork of imbibition.

tween wettability and initial water saturation can be strongly dependent on crude oil properties.⁵ Correlations between I'_w and S_{wi} for Moutray and ST-86 crude oils are shown in Fig. 15. Results from the present study for 48, 72, and 240 hour aging time are included in Fig. 15. As aging time increases, the data for A'93 crude oil approach the correlation obtained for Moutray crude oil.

Wettability and Oil Recovery. Oil recovery at breakthrough R_{bt} vs. relative pseudowork of imbibition W_R , and final oil recovery by waterflooding R_{wf} vs. W_R are shown in Fig. 16. Both R_{bt} and R_{wf} are fairly constant for $W_R > 0.20$. For $W_R < 0.20$, there is close correlation between R_{bt} vs. W_R and R_{wf} vs. W_R , especially for initial water saturations of 15 and 20%; results for 25% initial water saturation are relatively scattered. This may be related to employing re-used, rather than duplicate, core plugs. For mixed wettability systems, the water saturation retained after secondary drainage is generally higher than for primary drainage.²⁴ Even though measures can be taken to achieve the same magnitude of initial water saturation as for primary drainage, the distribution may not be the same. Furthermore, possible desorption and/or adsorption of crude oil components onto rock surfaces related to the distribution of water and the re-use of cores may also affect the waterfloods.

Fig. 17 shows the relationship between oil recovery by imbibition R_{im} and the relative pseudowork of imbibition W_R . The correlation between R_{wf} and W_R is also included in Fig. 17 for comparison. For $W_R < 0.20$, there is close correlation of results for all levels of initial water saturation.

The relationships between oil recovery by waterflooding at breakthrough R_{bt} and final oil recovery by waterflooding R_{wf} and Amott wettability index to water I'_w are shown in Fig. 18. Fig. 19 shows the relationship between oil recovery by imbibition R_{im} and I'_w . The correlation between R_{wf} and I'_w is also included in Fig. 19. Both the relative pseudowork of imbibition and the Amott wettability index to water correlate with oil recovery.

The results of this study further demonstrate the highly significant effect of wettability on the waterflood recoveries both at and after breakthrough. The trend of increase in waterflood recovery with decrease in imbibition rate agrees with previous results for which wettability was varied by differences in aging temperature.⁸ However, both imbibition rate and waterflood recovery were observed to increase for a synthetic core material with increase in

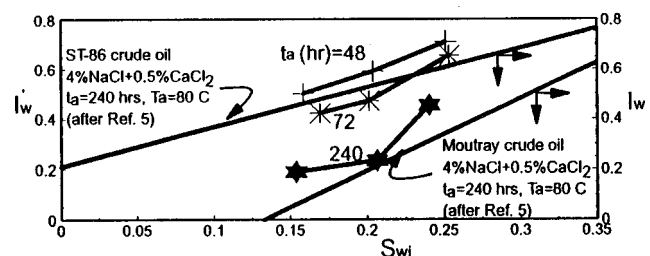


Fig. 15—Comparison of relationships between S_{wi} and I'_w with different COBR systems.

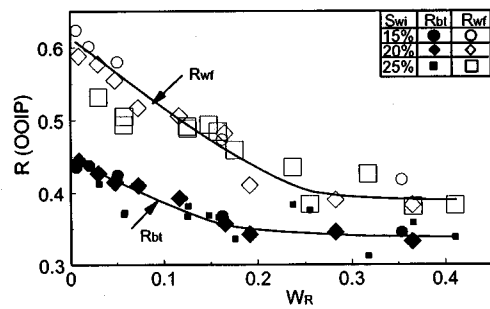


Fig. 16—Oil recovery by waterflooding at breakthrough R_{bt} and final recovery R_{wf} vs. relative pseudowork of imbibition.

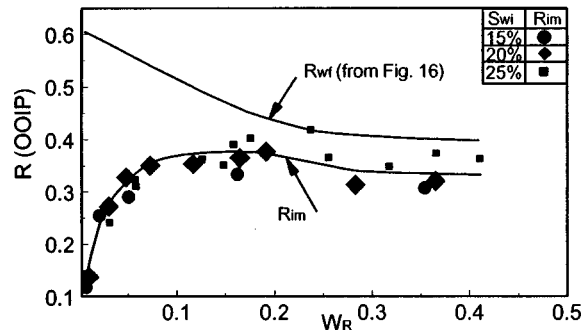


Fig. 17—Oil recovery by imbibition R_{im} and by final recovery R_{wf} vs. relative pseudowork of imbibition.

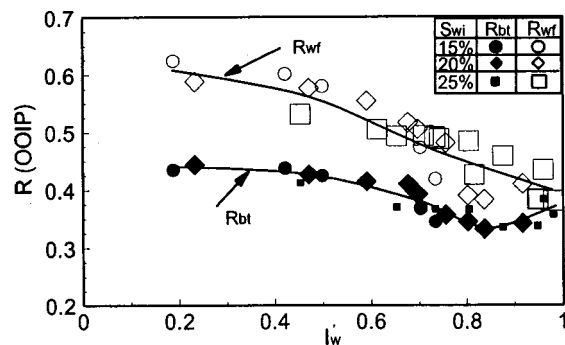


Fig. 18—Oil recovery by waterflooding at breakthrough R_{bt} and final recovery R_{wf} vs. Amott wettability index to water.

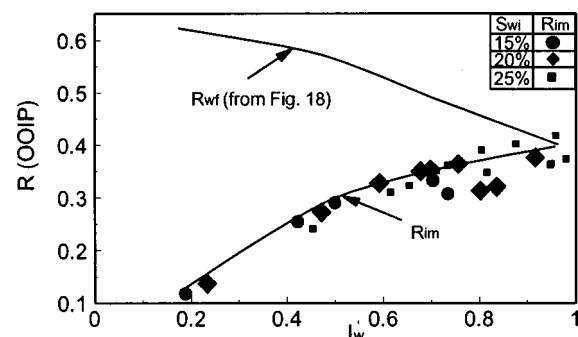


Fig. 19—Oil recovery by imbibition R_{im} and by waterflood R_{wf} vs. Amott wettability index to water.

brine pH from 4 to 8.²⁵ Thus, while change in imbibition rate usually signifies a change in waterflood recovery, the direction of change can be highly dependent on the circumstances. Additional imbibition and waterflood data sets for variation in all three components of COBR ensembles and testing protocol are needed to establish a satisfactory working knowledge of the relationships between wettability and oil recovery.

Conclusions

Based on results for which cores were aged with crude oil at elevated temperature to provide varying degrees of water wetness and imbibition and waterflood tests were run at room temperature, the following conclusions can be drawn:

1. The rate of spontaneous imbibition is highly sensitive to wettability. Correlated spontaneous imbibition data can be used to characterize wettability either through the relative pseudowork of imbibition, which involves the whole imbibition curve, or by an apparent dynamic advancing contact angle based on the time required for 50% recovery by imbibition.
2. Increase in aging time resulted in decrease in water wetness as indicated by the Amott wettability index to water, the apparent dynamic advancing contact angle, or the relative pseudowork of imbibition.
3. Decrease in initial water saturation in the range 25 to 15% resulted in decrease in water wetness.
4. Oil recovery by spontaneous imbibition passes through a maximum in recovery with decrease in water wetness from very strongly water-wet conditions.
5. Oil recovery by waterflooding increased with decrease in water wetness for crude oil/brine/rock ensembles in which aging time and initial water saturation were varied and other factors were held essentially constant.

Nomenclature

- A = area, L^2 , cm^2
- a = constant
- I = Amott wettability index
- k = permeability, L^2 , md
- L = length, L , cm
- N = dimensionless number
- P = pressure, m/Lt^2 , psi
- r = radius, L , cm
- R = oil recovery
- S = saturation
- t = time, t , min
- T = temperature, $^{\circ}C$
- V = bulk volume, L^3 , cm^3
- W = pseudowork of imbibition
- X = distance from imbibition surface to no-flow boundary, L , cm
- Θ = apparent dynamic advancing contact angle
- μ = viscosity, m/Lt , cP
- ϕ = porosity
- ρ = density, m/L^3 , g/cm^3
- σ = interfacial tension, m/t^2 , dyn/cm

Subscripts

- a = aging
- Ad = advancing
- b = brine
- bt = breakthrough
- C = characteristic
- cd = dynamic capillary
- c,s = pseudocapillary
- C,S = characteristic for simulation
- D = dimensionless
- g = gas
- i = i th imbibition direction or imbibition
- im = imbibition
- L = Leverett or length
- o = oil

of = oilflooding
 oi = initial oil
 or = residual oil
 R = relative
VSWW = very strongly water wet
 w = water
 wf = waterflooding
 wi = initial water
 $w-o$ = Amott-Harvey water-oil

Superscripts

' = modified Amott index

Acknowledgments

Support for this project was provided by Arco, British Petroleum (U.K./U.S.A.), Chevron, Conoco, Dagang (China), ELF (France), Exxon, Mobil, NorskHydro (Norway), Phillips, Shell (The Netherlands), Statoil (Norway), the Enhanced Oil Recovery Institute of the U. of Wyoming, and the Western Research Institute/U.S. DOE Jointly Sponsored Research program. We are pleased to acknowledge discussions with J. S. Buckley.

References

- Jerauld, G.R. and Rathmell, J.J.: "Wettability and Relative Permeability of Prudhoe Bay: A Case Study in Mixed-Wet Reservoirs," *Proc.*, 3rd Intl. Symposium on Evaluation of Reservoir Wettability and Its Effect on Oil Recovery, Laramie, Wyoming (1994).
- Morrow, N.R.: "A Review of the Effects of Initial Water Saturation, Pore Structure, and Wettability on Oil Recovery by Waterflooding," North Sea Oil and Gas Reservoirs Seminar, Graham and Trotman, Ltd., London (1987) 179.
- Morrow, N.R.: "Wettability and Its Effect on Oil Recovery," *JPT* (December 1990) 1476; *Trans.*, AIME, **289**.
- Salathiel, R.A.: "Oil Recovery by Surface Film Drainage in Mixed-Wettability Rocks," *JPT* (October 1973) 1216; *Trans.*, AIME, **255**.
- Jadhunandan, P.P. and Morrow, N.R.: "Effect of Wettability on Waterflood Recovery for Crude Oil/Brine/Rock Systems," *SPEFE* (February 1995) 4.
- Amott, E.: "Observations Relating to the Wettability of Porous Rock," *Trans.*, AIME (1959) **216**, 156.
- Boneau, D.F. and Clampitt, R.L.: "A Surfactant System for the Oil-Wet Sandstone of the North Burbank Unit," *JPT* (May 1997) 501.
- Jadhunandan, P.P. and Morrow, N.R.: "Spontaneous Imbibition of Water by Crude Oil/Brine/Rock Systems," *In Situ* (1991) **15**, No. 4, 319.
- Anderson, W.G.: "Wettability Literature Survey—Part 2: Wettability Measurement," *JPT* (November 1986) 1246.
- Cuiec, L.E.: "Evaluation of Reservoir Wettability and Its Effect on Oil Recovery," *Interfacial Phenomena in Petroleum Recovery*, N. R. Morrow (ed.), Surfactant Science Series, Marcel Dekker, Inc., New York City (1991) **36**, 257–88.
- Zhou, X. *et al.*: "The Effect of Crude Oil Aging Time and Temperature on the Rate of Water Imbibition and Long-Term Recovery by Imbibition," *SPEFE* (December 1995) 259.
- Ma, S., Morrow, N.R., and Zhang, X.: "Generalized Scaling of Spontaneous Imbibition Data for Strongly Water-Wet Systems," *JPSE* (1997) **18**, 165.
- Ma, S. *et al.*: "Characterization of Wettability from Spontaneous Imbibition Measurements," *J. Cdn. Pet. Tech.* (1999) Special Edition, **38**, No 13, 56.
- Morrow, N.R. *et al.*: "Characterization of Wettability and Effect of Initial Water Saturation and Aging Time on Wettability and Oil Recovery by Waterflooding," *Proc.*, 3rd Intl. Symposium on Evaluation of Reservoir Wettability and Its Effect on Oil Recovery, Laramie, Wyoming (1994).
- Ma, S., Mason, G., and Morrow, N.R.: "Effect of Contact Angle on Drainage and Imbibition in Regular Polygonal Tubes," *Colloids Surf., A* (1996) **117**, 273.
- Ma, S., Zhang, X., and Morrow, N.R.: "Influence of Fluid Viscosity on Mass Transfer between Rock Matrix and Fractures," *J. Cdn. Pet. Tech.* (July 1999) **38**, No. 7, 25.
- Leverett, M.C.: "Flow of Oil-water Mixtures through Unconsolidated Sands," *Trans.*, AIME (1939) **132**, 149.
- Zhang, X., Morrow, N.R., and Ma, S.: "Experimental Verification of a Modified Scaling Group for Spontaneous Imbibition," *SPEFE* (November 1996) 280.
- Cuiec, L.: "Rock/Crude Oil Interactions and Wettability: An Attempt To Understand Their Interrelation," paper SPE 13211 presented at the 1985 Annual Conference and Exhibition, Houston, 16–19 September.
- Jadhunandan, P.P.: "Effects of Brine Composition, Crude Oil and Aging Conditions on Wettability and Oil Recovery," PhD dissertation, New Mexico Institute of Mining and Technology, Socorro, New Mexico (1990).
- Liu, Y. and Buckley, J.S.: "Wetting Alteration by Adsorption from Crude Oil," *Proc.*, 3rd Intl. Symposium on Evaluation of Reservoir Wettability and Its Effect on Oil Recovery, Laramie, Wyoming (1994).
- Mennella, A. and Morrow, N.R.: "Point-by-Point Method of Determining Contact Angles from Dynamic Wilhelmy Plate Data for Oil/Brine/Solid Systems," *J. Colloid Interface Sci.* (May 1995) **172**, 48.
- Buckley, J.S. *et al.*: "Asphaltenes and Crude Oil Wetting—The Effect of Oil Composition," paper SPE 35366 presented at the 1996 SPE/DOE Symposium on Improved Oil Recovery, Tulsa, Oklahoma, 21–24 April.
- Morrow, N.R. and Melrose, J.C.: "Application of Capillary Pressure Measurements To the Determination of Connate Water Saturation," *Interfacial Phenomena in Petroleum Recovery*, N.R. Morrow (ed.), Surfactant Science Series, Marcel Dekker, Inc., New York City (1991) **36**, 257–288.
- Buckley, J.S., Bousseau, C., and Liu, Y.: "Wetting Alteration by Brine and Crude Oil: From Contact Angle To Cores," paper SPE 30765, presented at the 1995 SPE Annual Technical Conference and Exhibition, Dallas, 22–25 October.

SI Metric Conversion Factor

psi \times 6.894 757 E+00 = kPa

SPEJ

Xianmin Zhou is an associate engineer at Westpoint Technology Center Intl. in Houston. e-mail: xzhou@ddpo.com. Previously, he was a senior core analyst at Reservoirs Inc. and a visiting engineer at Western Research Inst. Zhou holds a BS degree from Daqing Petroleum Inst. and an MS degree from the U. of Wyoming, both in petroleum engineering. **Norman R. Morrow** is Professor of Chemical and Petroleum Engineering and J. E. Warren Distinguished Professor of Energy and Environment at the U. of Wyoming in Laramie. e-mail: morrownr@uwyo.edu. He formerly was head of petrophysics and surface chemistry at the New Mexico Petroleum Recovery Research Center. Morrow holds a BS degree in chemical engineering and a PhD degree in mineral engineering from the U. of Leeds. He is a member of the Editorial Review Committee and has served on Annual Meeting technical committees. **Mark Ma** is a research engineer at Exxon Production Research Co. in Houston. e-mail: mark.ma@exxon.sprint.com. His research interests include pore structure, capillarity, wettability, and oil recovery by waterflooding. He previously worked at the Western Research Inst. Ma holds a BS degree from Petroleum U. of China and MS and PhD degrees in petroleum engineering from New Mexico Tech.